Specifications

UH5B Series		65UH5B	55UH5B	49UH5B	
	Screen Size	65	55	49	
PANEL	Panel Technology	IPS	IPS	IPS	
	Aspect Ratio	16:9	16:9	16:9	
	Native Resolution	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	
	Brightness	500cd/m ²	500cd/m ²	500cd/m ²	
	Contrast Ratio	1,100:1	1,100:1	1,100:1	
	Dynamic CR	1,000,000:1	1,000,000:1	1,000,000:1	
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	
	Surface Treatment	Low Haze 1%	Low Haze 1%	Low Haze 1%	
	Life time (Typ.)	50,000 Hrs (Typ.)	50,000 Hrs (Typ.)	50,000 Hrs (Typ.)	
		24 Hours	24 Hours	24 Hours	
	Guaranteed Operating Hour	Portrait & Landscape	Portrait & Landscape	Portrait & Landscape	
	Orientation				
CONNECTIVITY	Input	HDMI, DP, DVI-D, Audio, USB 3.0, SD Card			
	Output	DP, Audio, External Speaker (L/R)			
	External Control	RS232C (In/Out), RJ45, IR Receiver, Pixel Sensor			
PHYSICAL SPECIFICATION	Bezel Color		Black	Black	
	Bezel Width	12.1mm(T), 12.6mm(R/L), 15.7mm(B)	12.1mm(T), 12.6mm(R/L), 15.7mm(B)	11.9mm(T), 12.4mm(R/L), 15.5mm(E	
	Monitor Dimensions (W x H x D)	1458.6mm x 848.9mm x 40.1mm	1239.8 x 725.2 x 38.6mm	1103.2 x 648 x 38.6mm	
	Weight (Head)	26.0Kg	16.6kg	13.3kg	
	Weight (Head + Stand)	27.4Kg	18.1kg	14.8kg	
	Monitor with Optional Stand & Speaker Dimensions (W x H x D)	1458.6mm x 915.8mm x 313.9mm	1239.8 x 788.8 x 298.3mm	1103.2 x 714.1 x 298.3mm	
	Weight (Head + Stand + Speaker)	28.1Kg	18.8kg	15.5kg	
	Carton Dimensions (W x H x D)	1561mm x 971mm x 190mm	1330 x 807 x 170mm	1197 x 760 x 166mm	
	Packed Weight	32.5Kg	21.1kg	17.7kg	
	VESA™ Standard Mount Interface	300 x 300mm	300 x 300mm	300 x 300mm	
SPECIAL FEATURES		Temperature Sensor, Auto Brightness Sensor, Tile Mode (up to 15x15), Natural Mode@Tile Mode, ISM Method, Internal Memory, Wi-Fi built-in, USB Cloning, Contents Scheduling, Sync mode, PM mode, Fail Over, Wake on LAN, BEACON (On/Off), Embedded Template			
ENVIRONMENTAL CONDITIONS	Operation Temperature Range	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C	
	Operation Humidity Range	10 % to 80 %	10 % to 80 %	10 % to 80 %	
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Type	Built-In Power	Built-In Power	Built-In Power	
POWER	Тур.	134W	116W	102W	
CONSUMPTION	Smart Energy Saving	90W	W08	70W	
STANDARD (CERTIFICATION)	Safety	UL/cUL/CB/TUV/KC			
	EMC	FCC Class "A" / CE / KCC			
	ErP / Energy Star	No/No			
MEDIA PLAYER COMPATIBILITY	OPS type compatible	Yes			
	External Media player Attachable	Yes (MP500/MP700)			
SOFTWARE	SuperSign-W / Lite	Yes			
COMPATIBILITY	SuperSign-C	Yes			
	Basic	Remote Controller (include 2ea batteries), Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender, Memory cover			
ACCESSORY	Optional	Speaker (SP-5200), Stand (ST-651T), Pixel sensor (KT-SP0), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100)	r (SP-5200), (ST-651T), T-SP0), Media player, ket (LSW350B), ter (AM-B330S), t (KT-OPSA), Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100)		

Connectivity

- SPEAKER OUT OVI-D IN
- 2 IR & LIGHT 9 DP IN
- SENSOR DP OUT
- SD Card 3 PIXEL SENSOR
- 4 HDMI
- RGB IN 6 LAN
- 6 AUDIO IN ♠ RS-232C IN AUDIO OUT

HDMI.





More info www.lgecommercial.com


You Tube youtube.com/c/LGECommercialDisplay

65UH5B / 55UH5B / 49UH5B





Prime Color Expression with SoC built-in Smart Platform Ultra HD UH5B Series

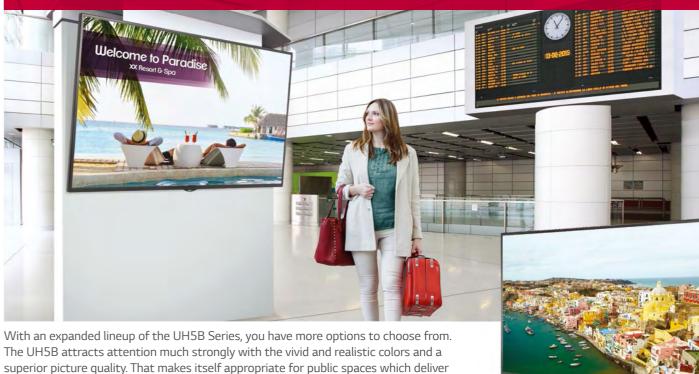

Key Features

commercial or informative message.

Ultra HD

ULTRA HD

Smart

Platform

Ultra HD Resolution (3840x2160)

Ultra HD Large screen delivers immersive viewing experience.



Quad Core SoC*

*SoC: System-on-Chip

High Efficiency Video Coding

Supports HEVC-based content which has the double data compression ratio than the H.264 so network traffic can be reduced



Up-Scaling and Super Resolution

Up-scaling and Super Resolution technology enhance the quality of FHD content to near-UHD quality.







webOS_{2.0}

The webOS 2.0 platform The High Performance SoC can execute several tasks at the provides easy and convenient same time and provides smooth content playback. tools to create contents.













Prime Color Expression with SoC built-in Smart Platform

Ultra HD UH5B Series



Screen Sizes 65"/55"/49"

UH5B Series

• Brightness: 500cd/m²

• Bezel: 65": 12.1mm(T), 12.6mm(R/L), 15.7mm(B) 55": 12.1mm(T), 12.6mm(R/L), 15.7mm(B) 49": 11.9mm(T), 12.4mm(R/L), 15.5mm(B)

• Depth : 65" : 40.1mm

55"/49" : 38.6mm

• Interface : HDMI / DVI / RGB / DP / RJ45 / IR / USB / SD Card / Pixel Sensor / RS232C / Daisy-Chain (DP1.2/RS232C)

NIPS ULTRA HD HEVC 24 Photograph WebOS 20

Supportive Convenience

BEACON

With BEACON and Bluetooth Low Energy (BLE) supported by UH5B, retail stores can provide coupons and information in real-time.



OPS* Kit / HDBaseT Box

The UH5B provides an OPS Kit to connect a third-party OPS player or HDBaseT box. Users have the flexibility to choose any media player as long as it complies with the OPS.



*OPS: Open Pluggable Specification

Other Features

Cost **Effectiveness**



Reduced Power Consumption by M+


It has excellent energy-efficiency and costsavings with the M+ panel, which decreases power consumption by approximately 31% compared to the RGB panel.



Space Management Efficiency

Slimmer Depth

The slimmer depth saves space for installation and makes the enclosure design slimmer.



Max 495 W

Real-Time Remote Monitoring

When an alarm occurs, an e-mail notification is sent using SuperSign C or SI SW through the SNMP Protocol. In case of malfunctions or errors, real-time remote care is available.



Dust & Humidity Protection

Circuit board reliability is enhanced with conformal coating that protects against dust, iron powder, humidity and other harsh conditions.



Built-in Wi-Fi

Built-in

Easy

Maintenance

Content sharing is more convenient on a Wi-Fi network.



The UH5B with SoftAP software can operate as a wireless access point for mobile devices.



Dimension (unit:mm)

65"

1458.6 x 848.9 x 40.1 / 26.0Kg

