
dvLED Connect-it



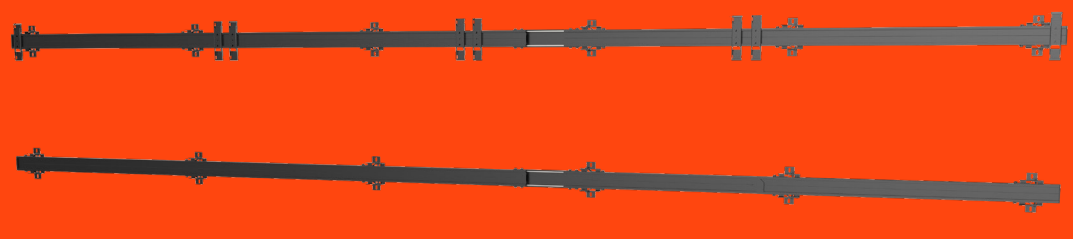

Installation Manual

EN	Product manual
DE	Produkthandbuch
FR	Manuel de produit
NL	Producthandleiding


CONTENTS

Pre information	2
Mounting Instructions	8
Contact Details	24


TÜVNORD Type Approved QA CERTIFIED

5 YEARS GUARANTEE

www.vogels.com

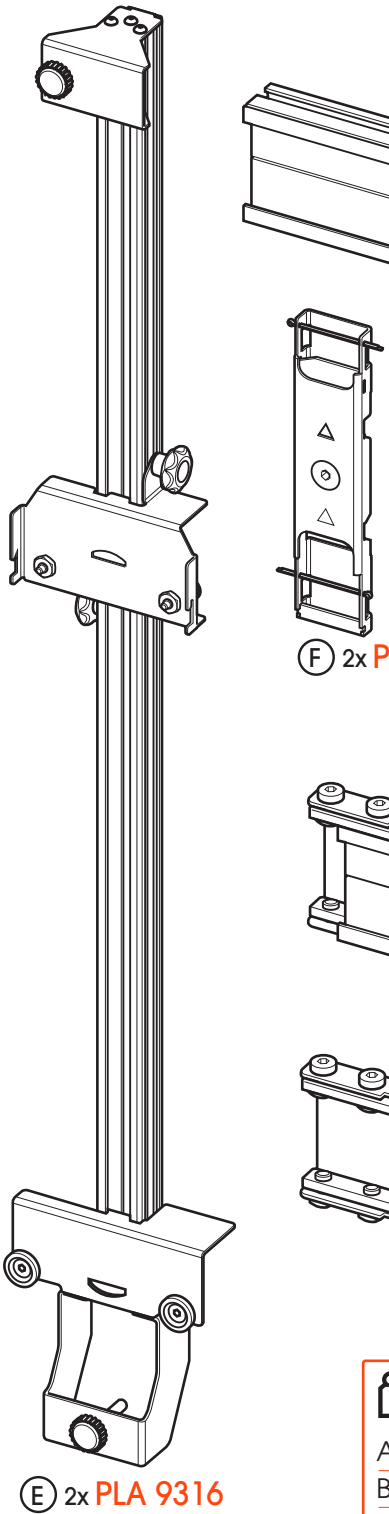


E 2x PLA 9316

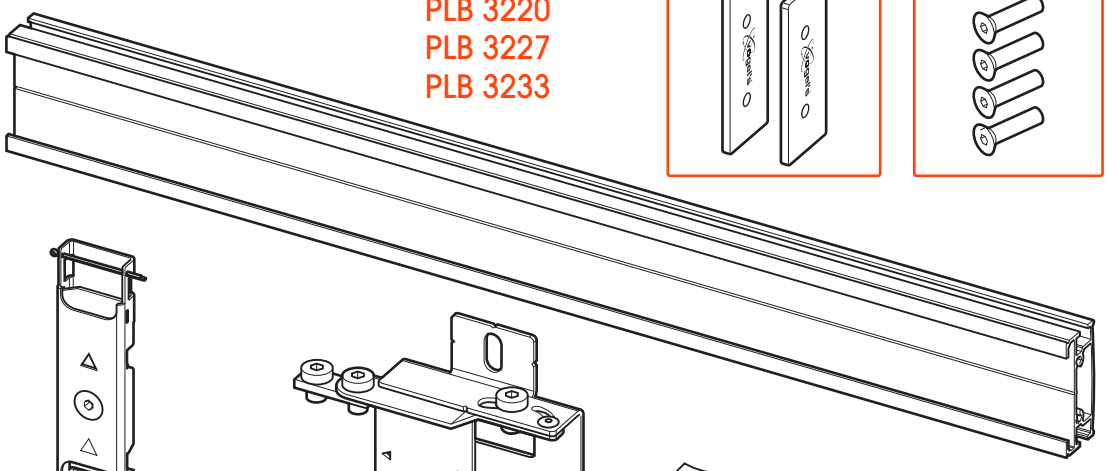


A PLB 3211
PLB 3220
PLB 3227
PLB 3233


F 2x PLA 9309

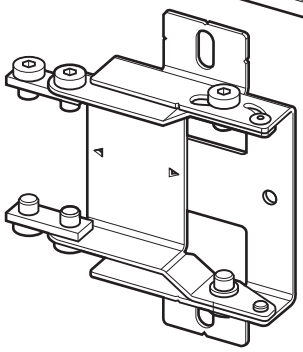


B PLA 9312

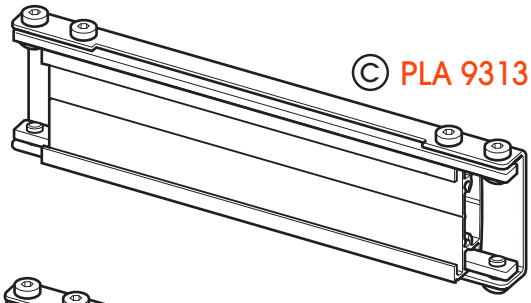


C PLA 9313

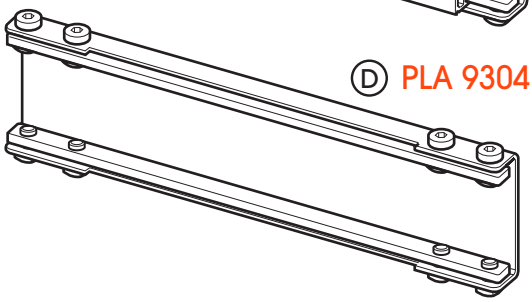

D PLA 9304

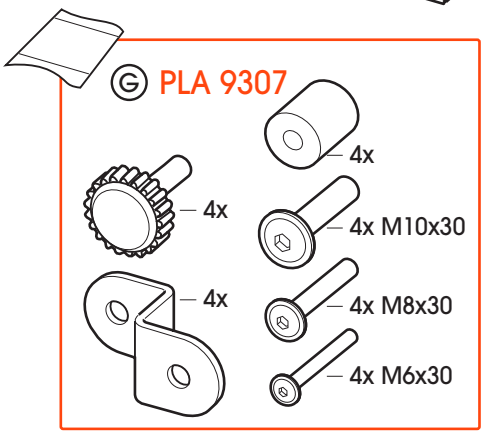


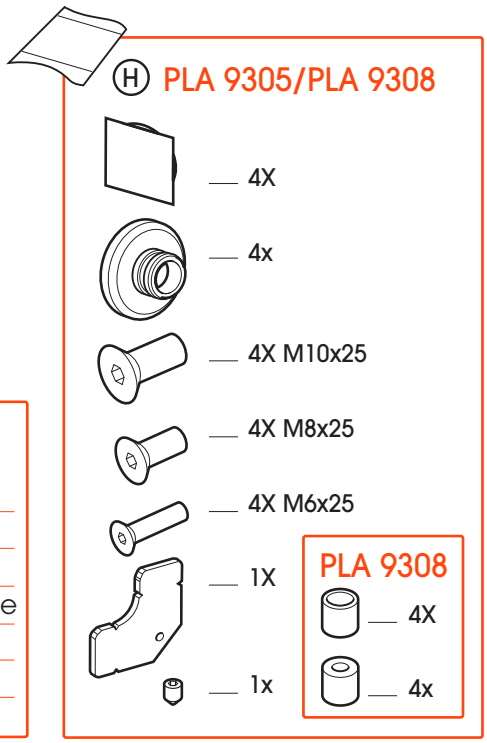

max. load

A. PLB 3XXX	110 kg/242 lbs per bar
B. PLA 9312	25 kg/55 lbs per bracket
C. PLA 9313	30 kg/66 lbs per coupler
D. PLA 9304	30 kg/66 lbs per end piece
E. PLA 9316	n.a.
F. PLA 9309	20 kg/44 lbs per bracket
H. PLA 9305	80 kg/176 lbs per 4 cams






www.vogels.com


ADJUSTING THE WALL BRACKETS PLA 9312

SET HEIGHT (max 10 mm)

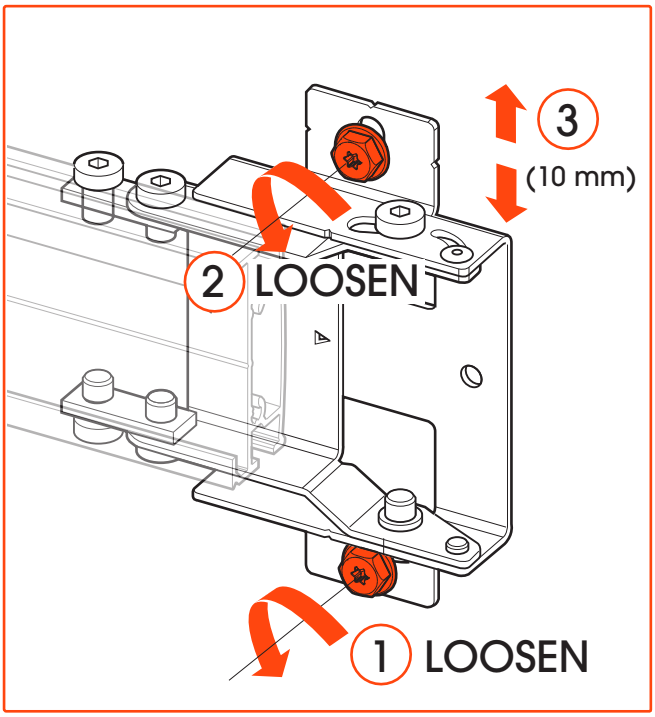


SET DISTANCE TO THE WALL


min. 40 mm
max. 80 mm

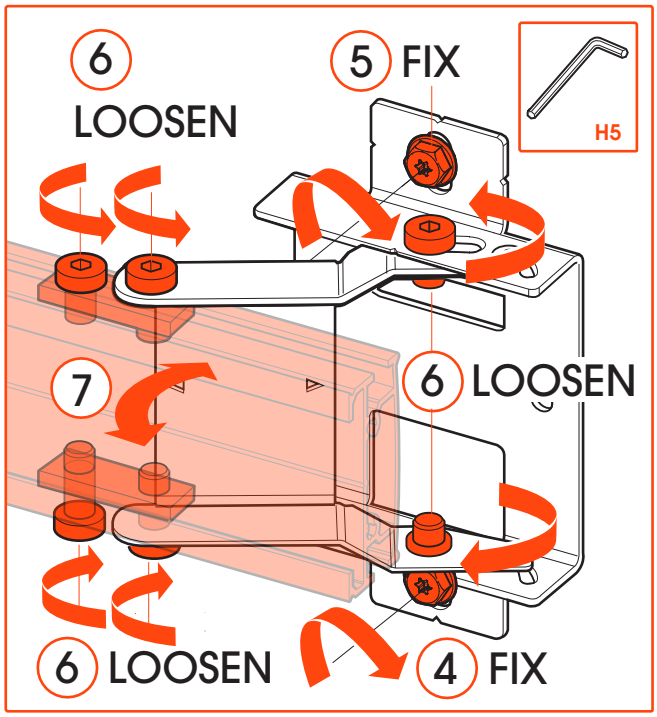


SET WIDTH

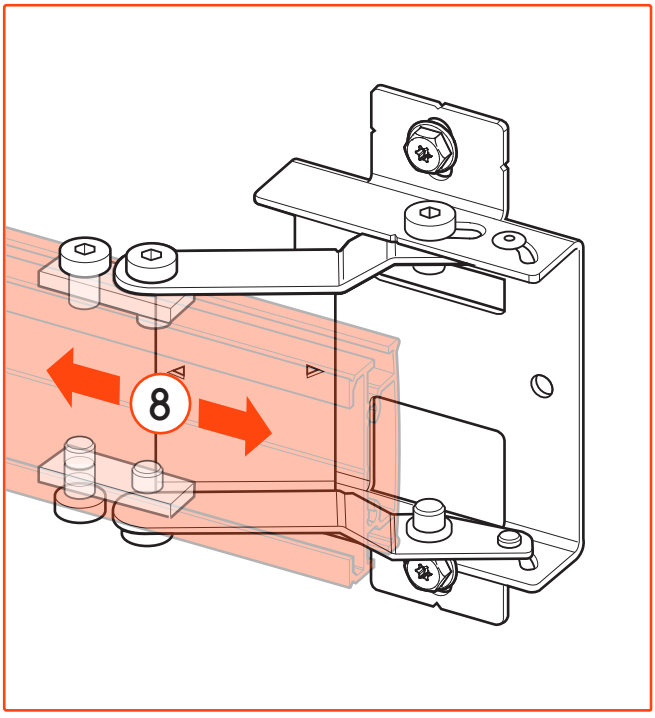

FIX

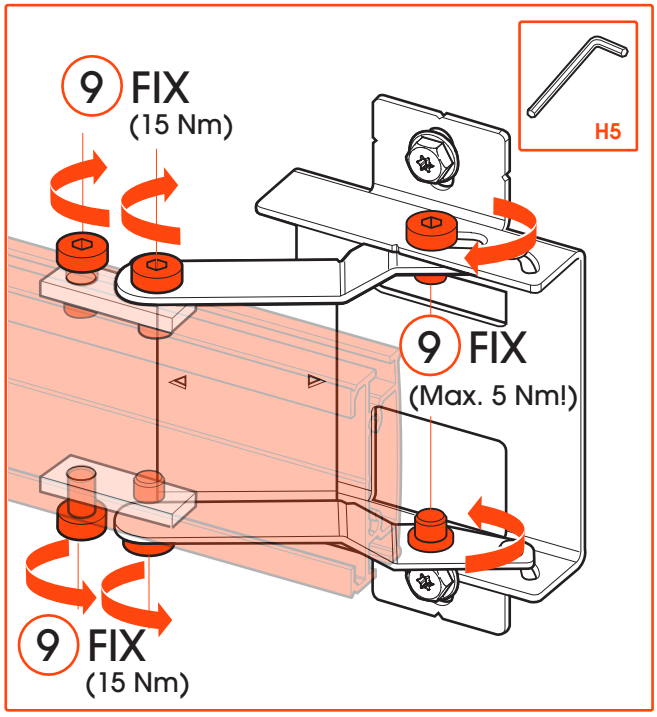


www.vogels.com

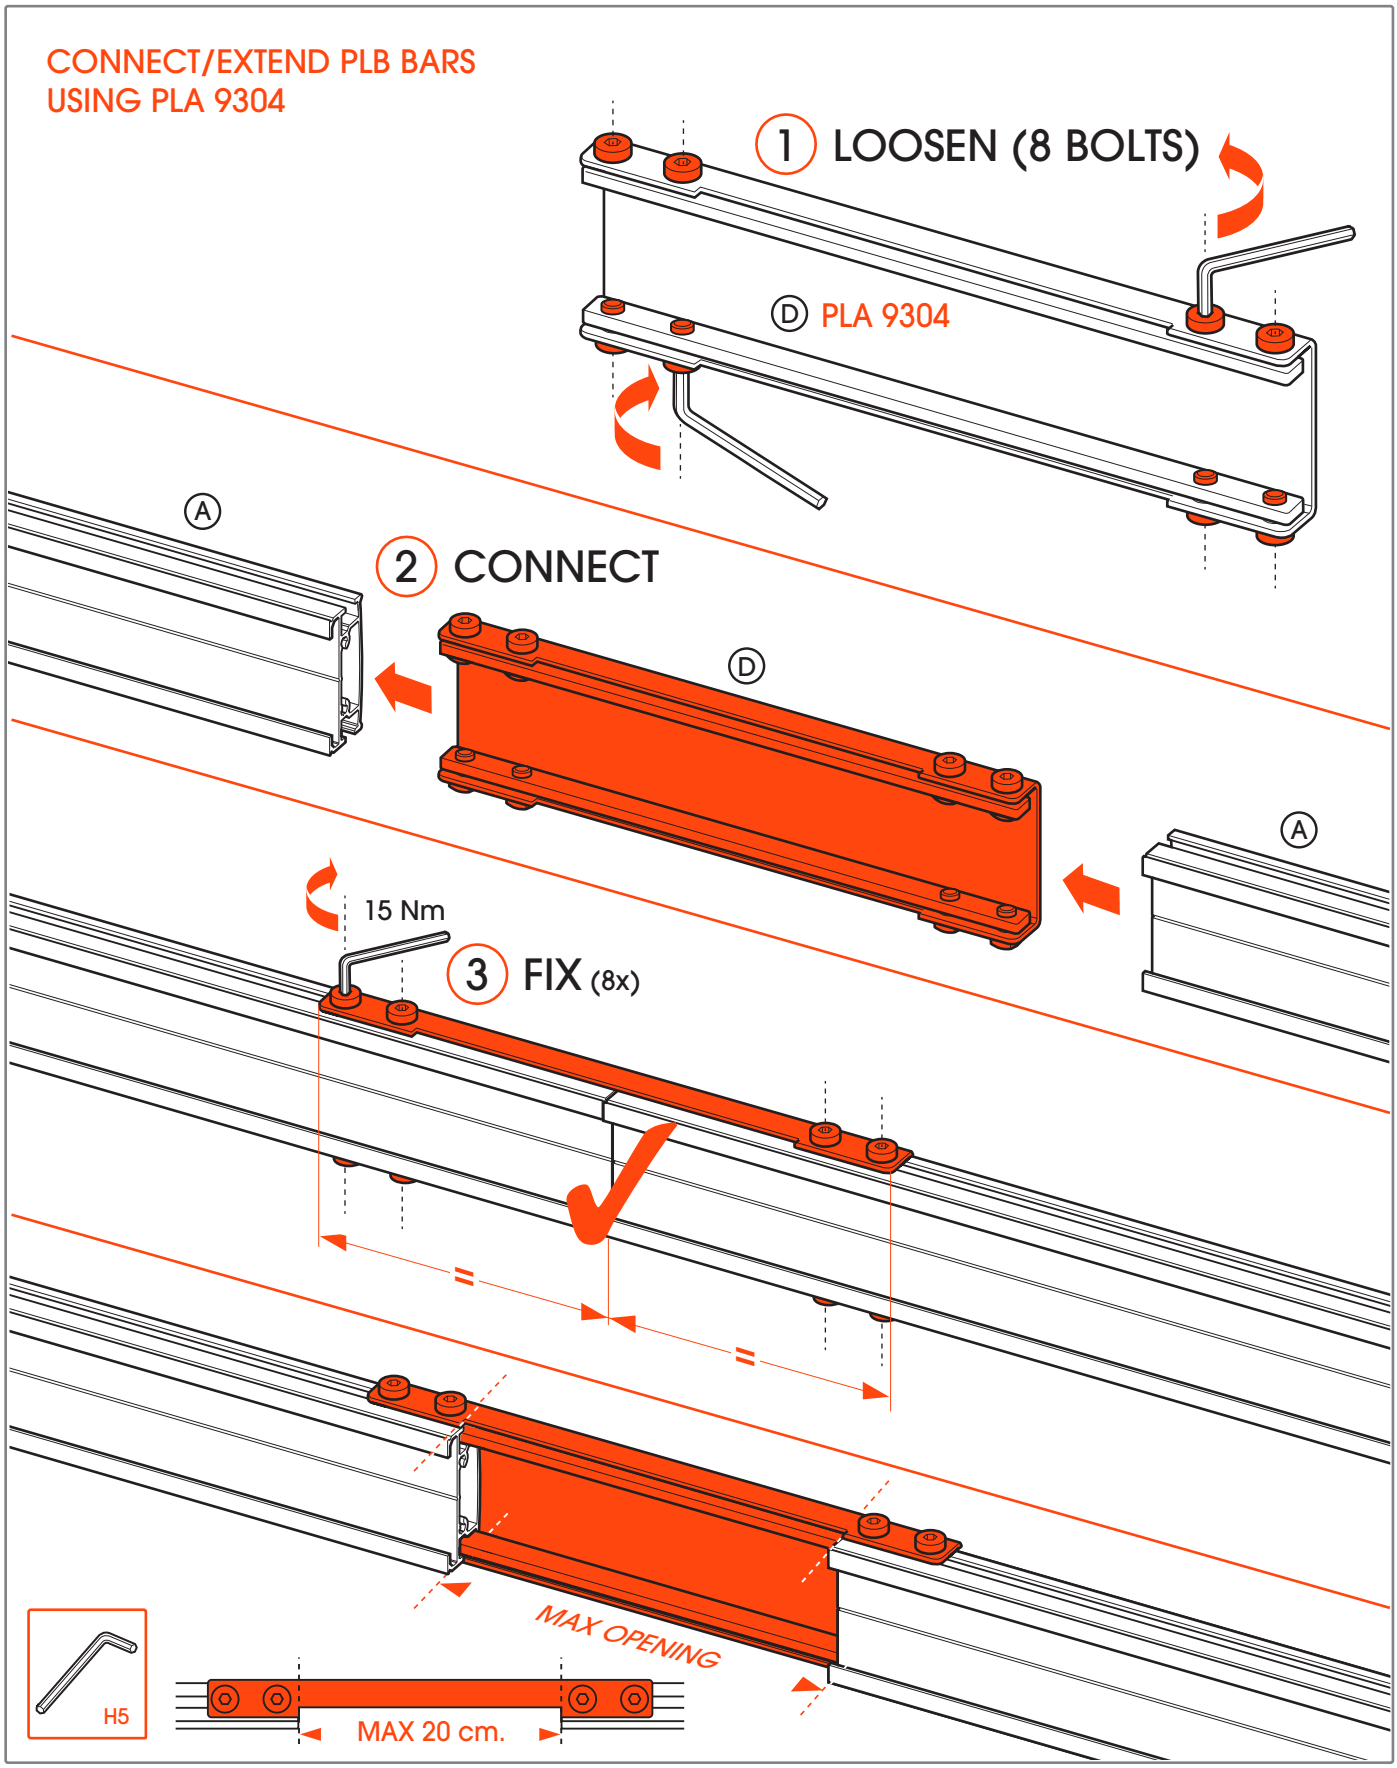

www.vogels.com

INSTALL EXTENSION PIECES (OPTIONAL PLA 9313)


left and/or right

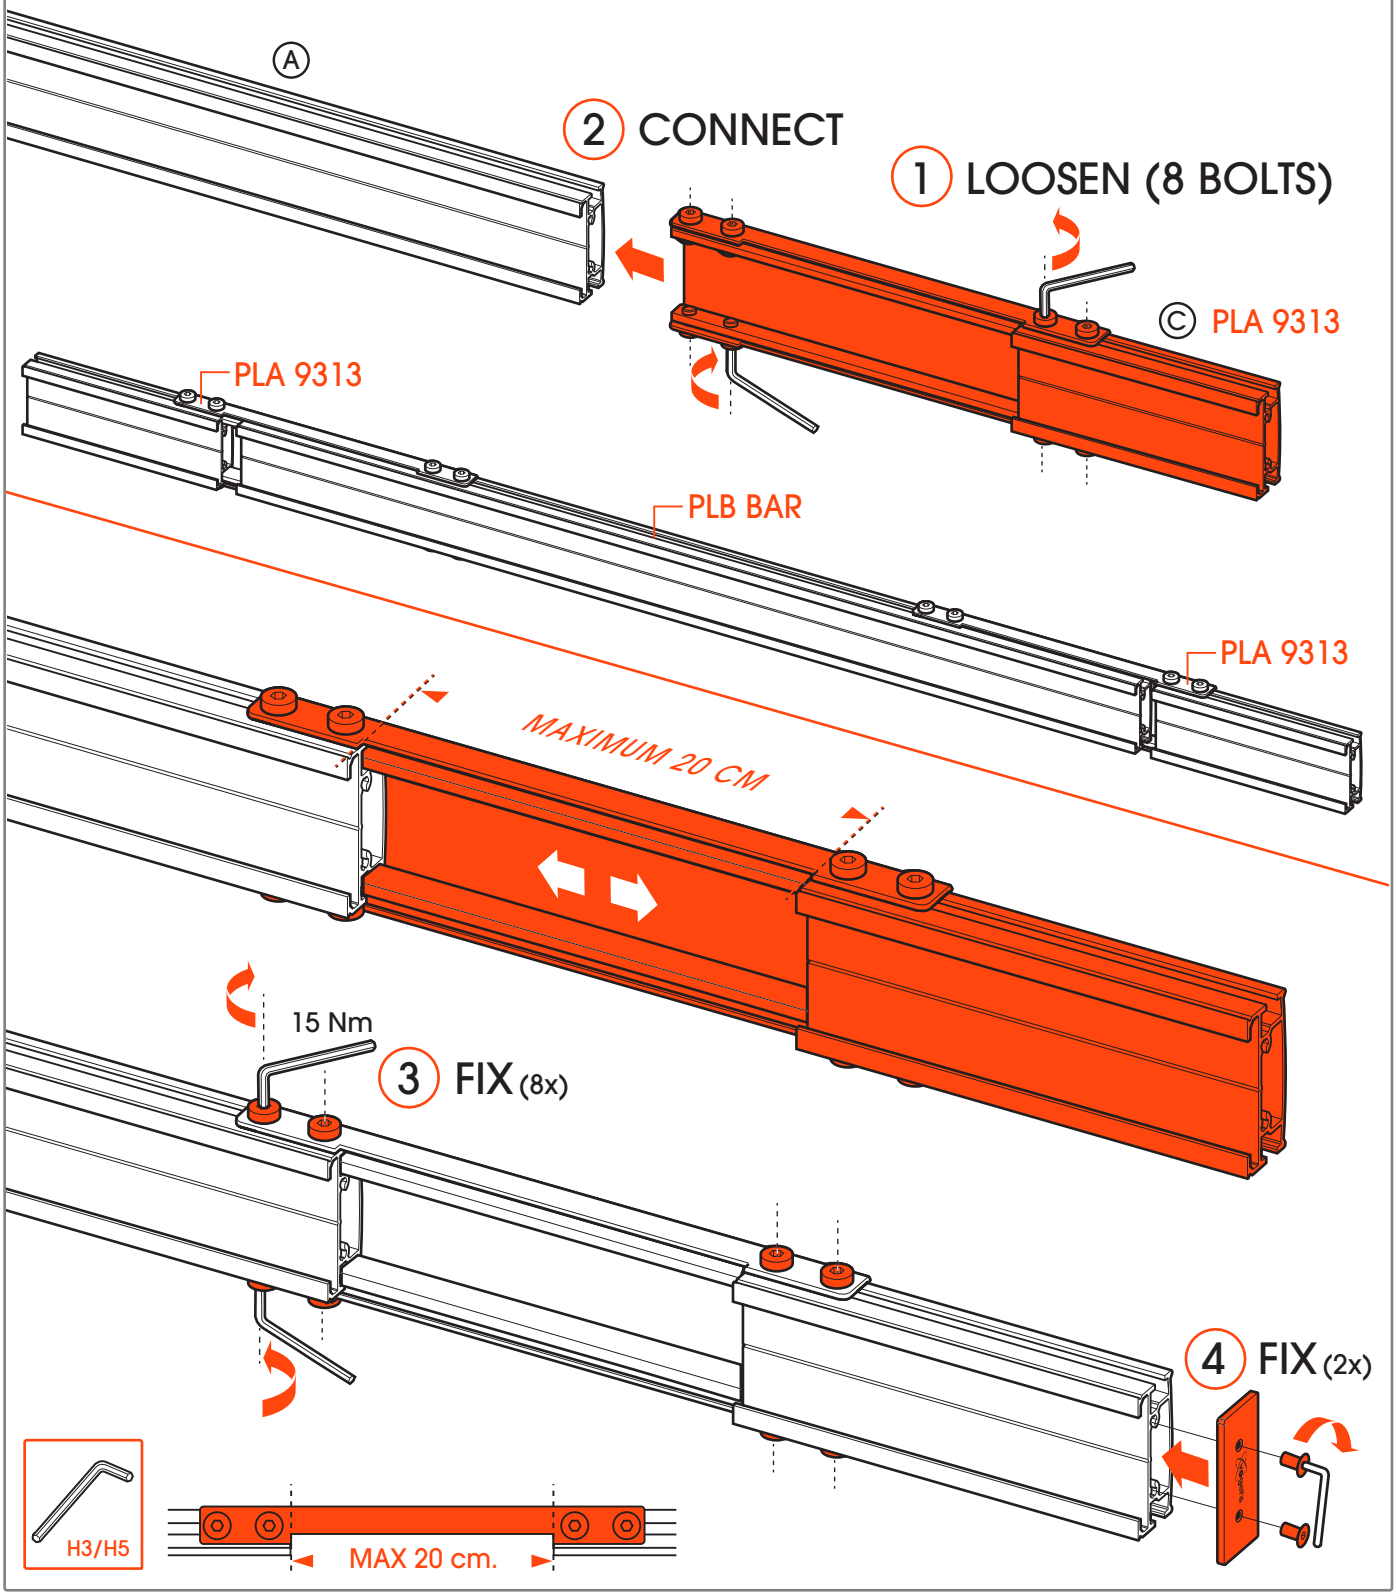

www.vogels.com

MOUNTING ADJUSTABLE FEET FOR WALL SOLUTION


explanation options PLA 9307

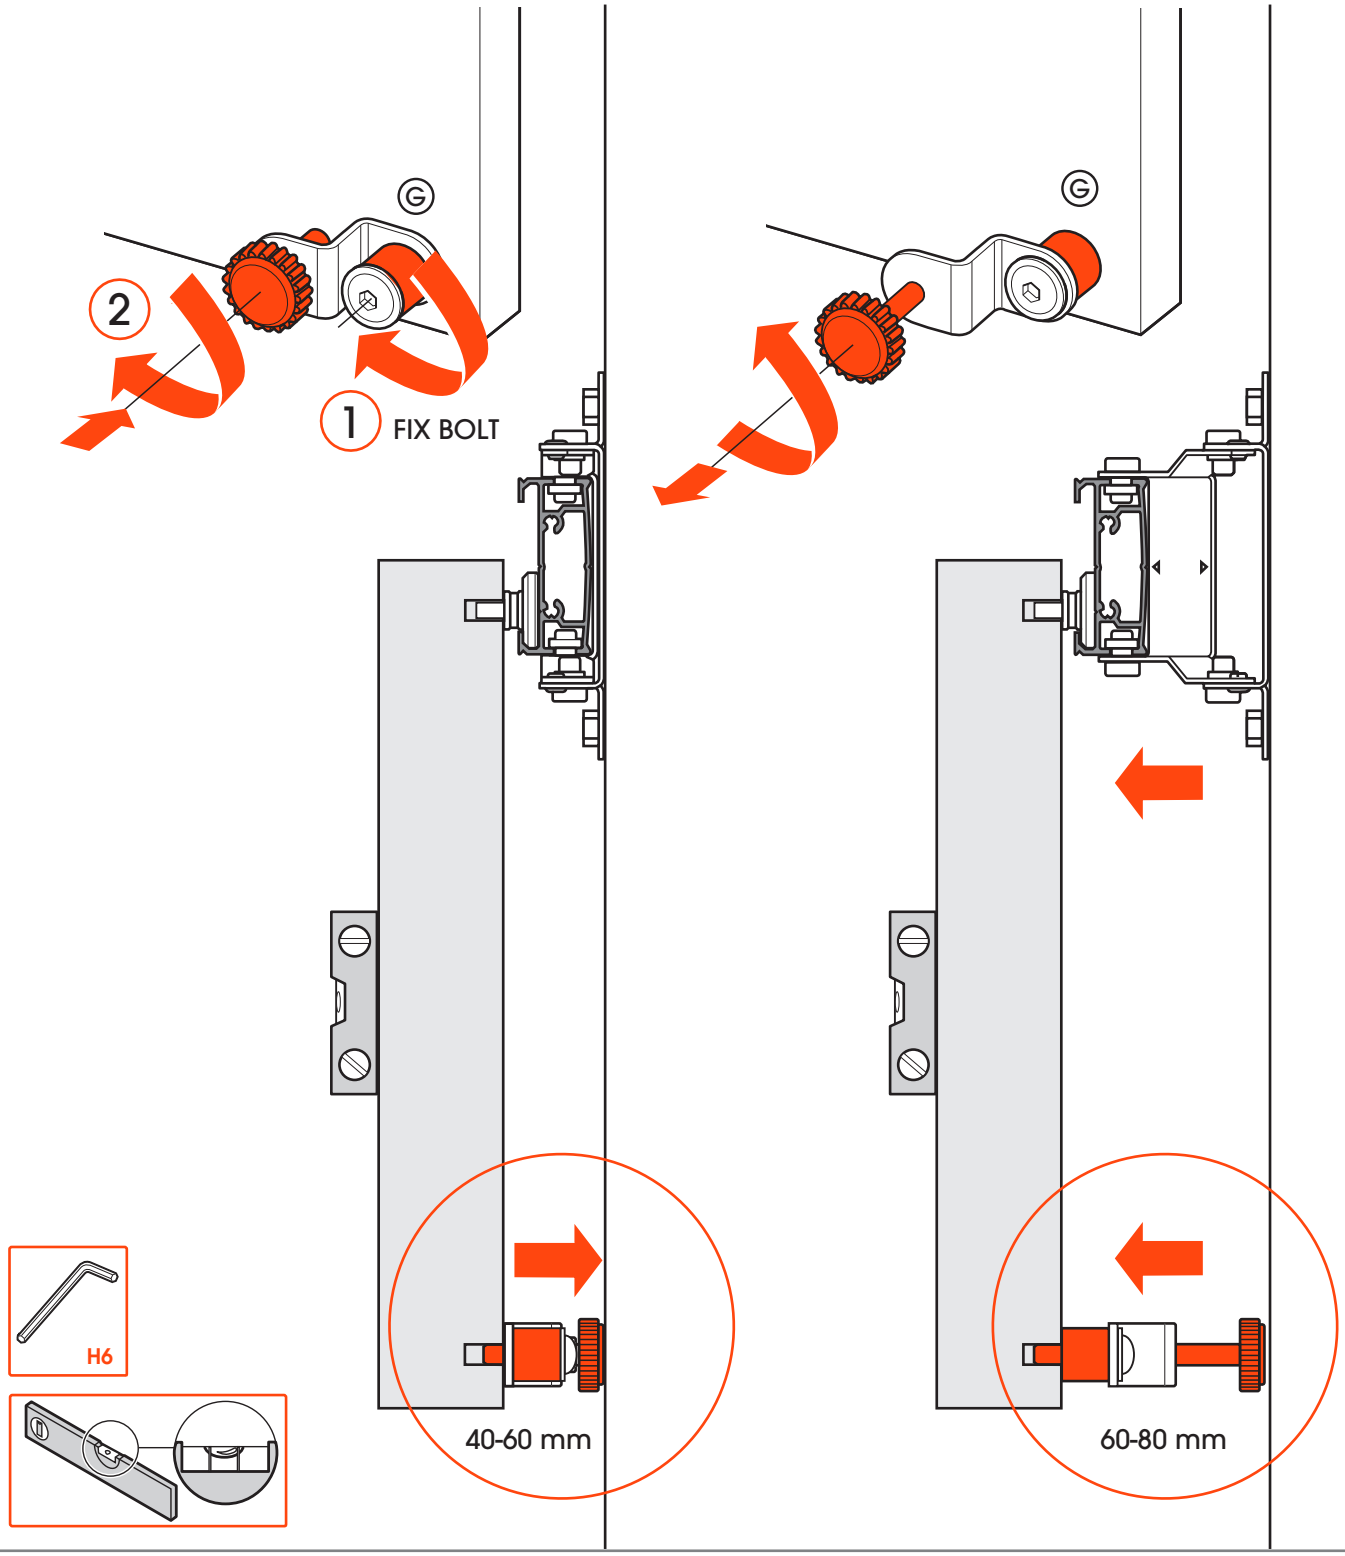


www.vogels.com

OPTIONAL PLA 9316
set spacer (1)


X (SEE ASSEMBLY STEPS)

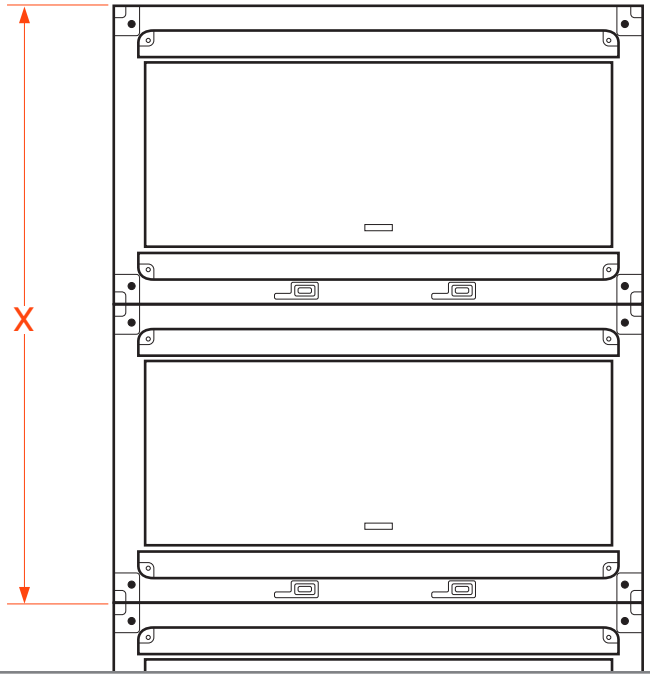


set spacer (2)

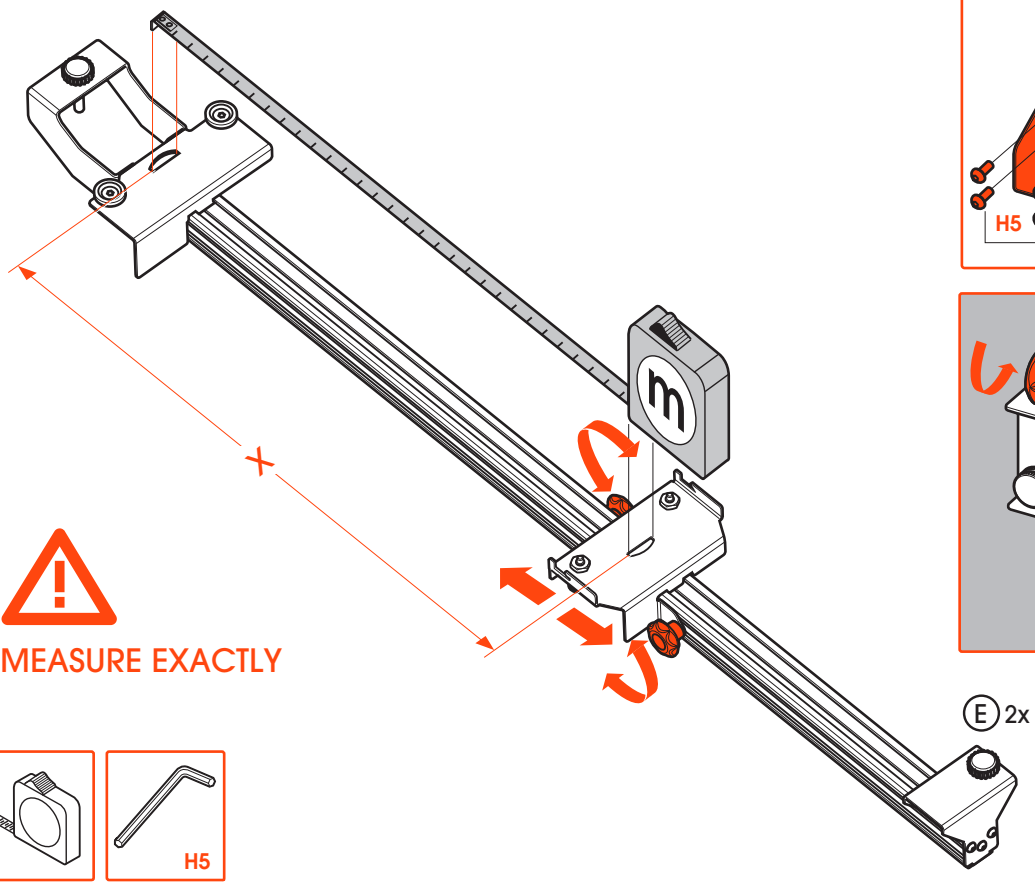

MEASURE EXACTLY

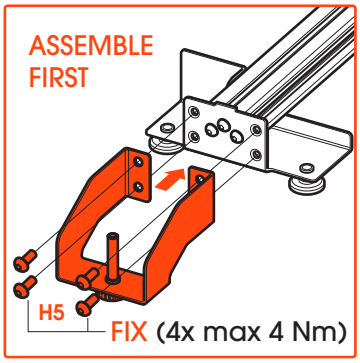


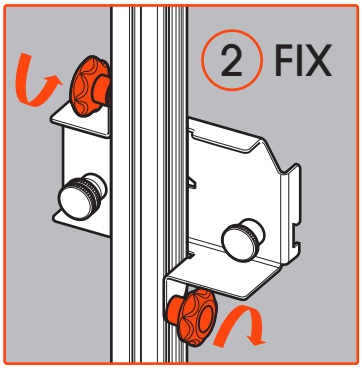

E 2x

www.vogels.com


1a INSTALL FIRST PLB BAR

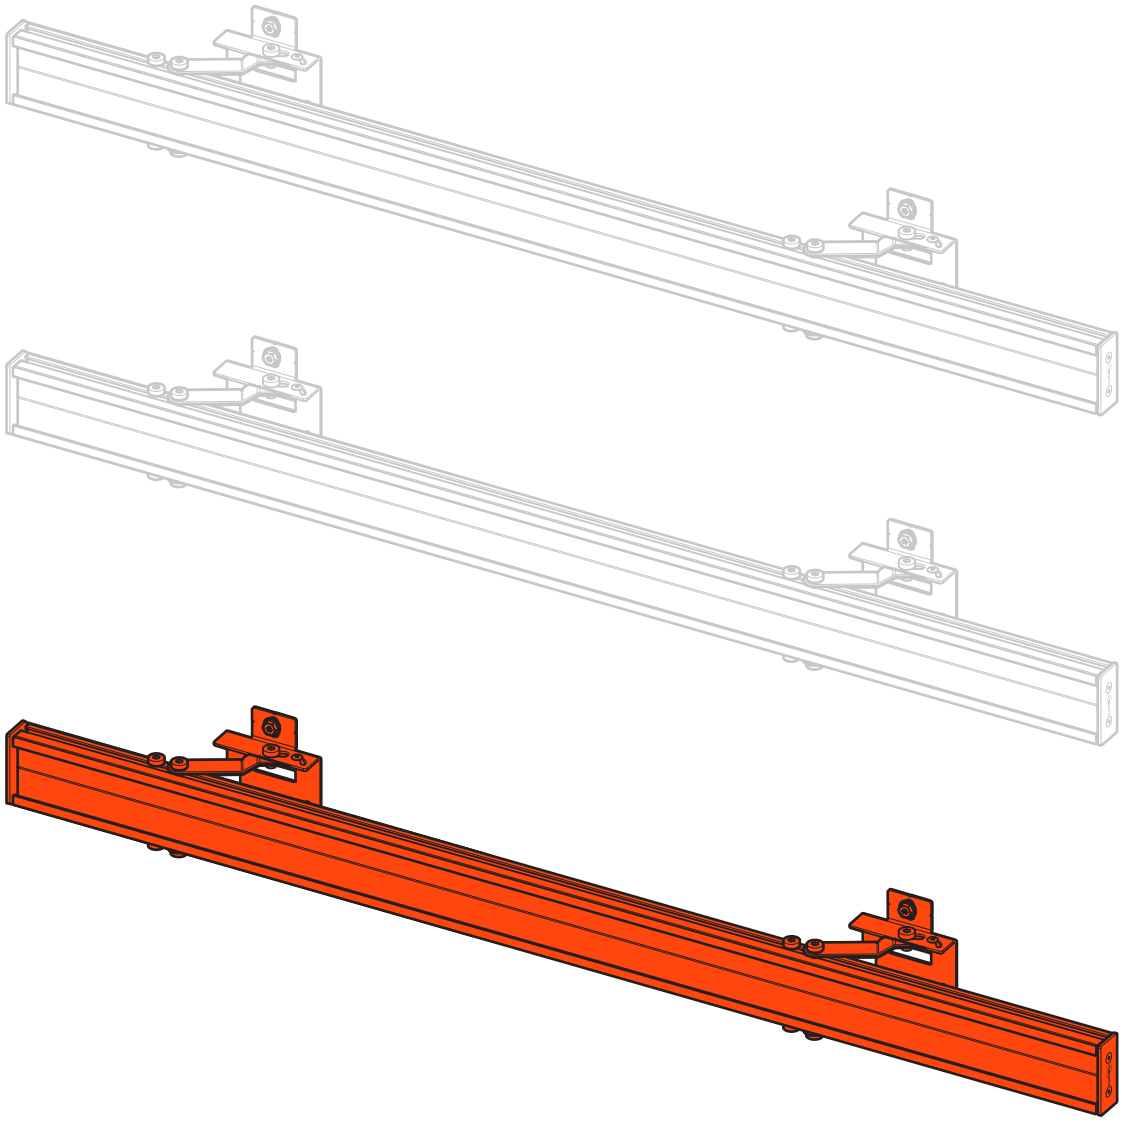


www.vogels.com

1b INSTALL WALL BRACKETS

Maximum distance between two brackets is 1600mm

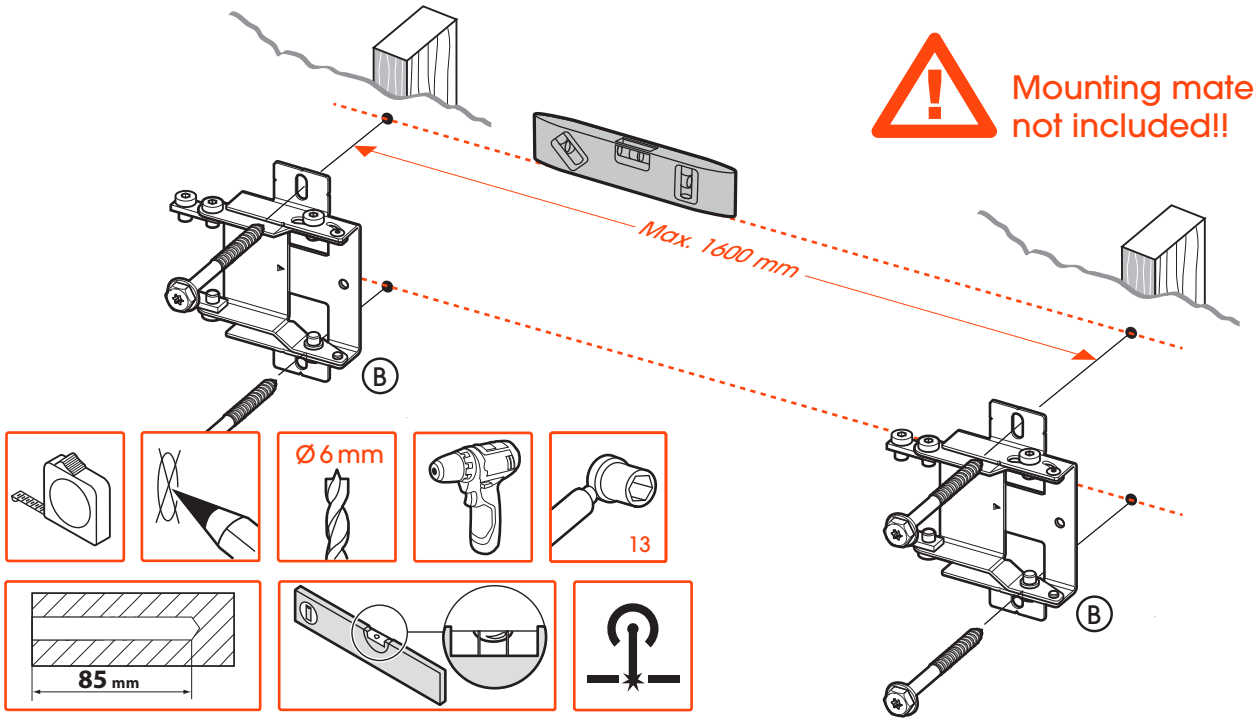


1c

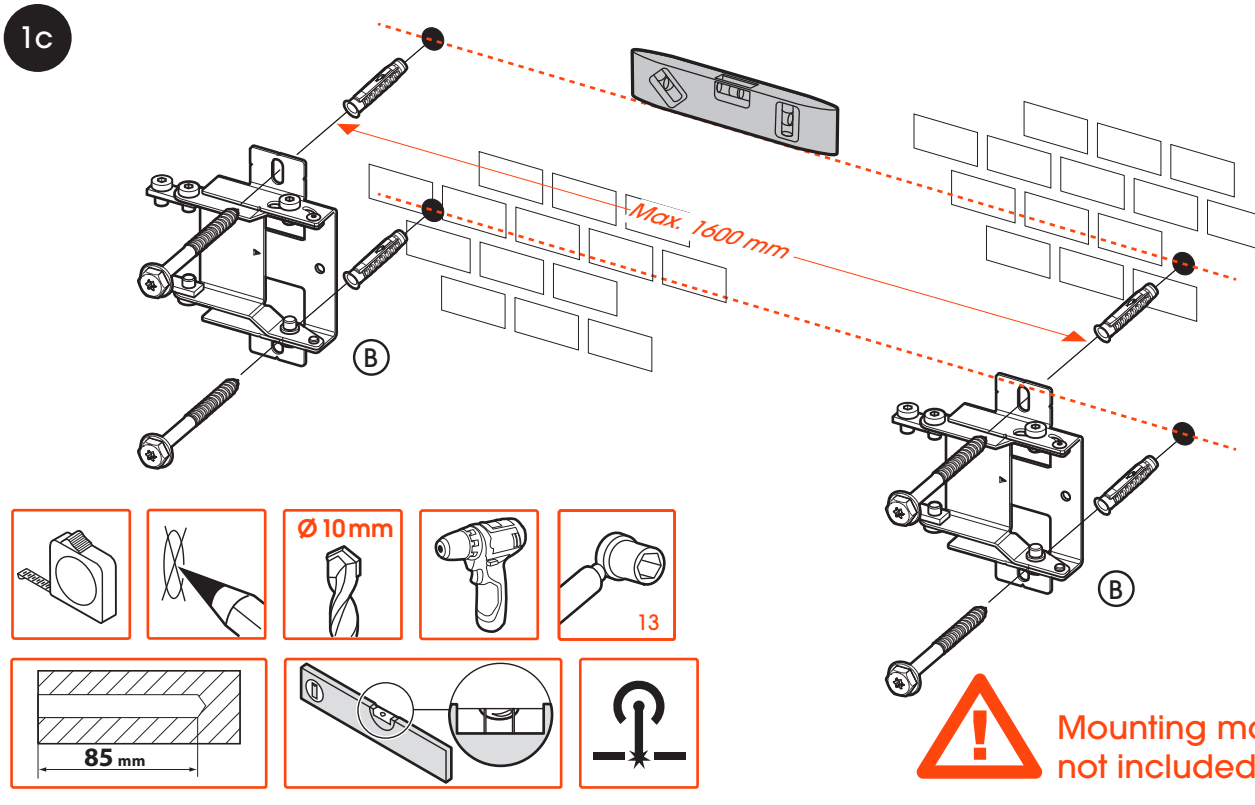


www.vogels.com


1d INSTALL FIRST PLB BAR
(slide PLB bar onto the brackets)

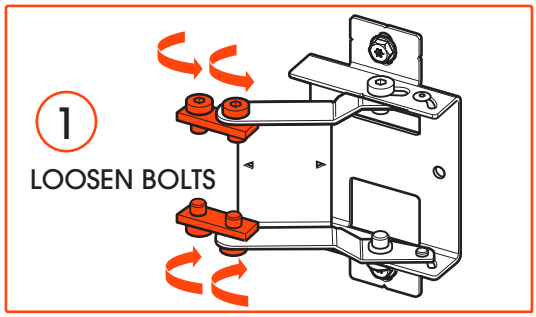




1e FIRST BAR FIXED TO WALL

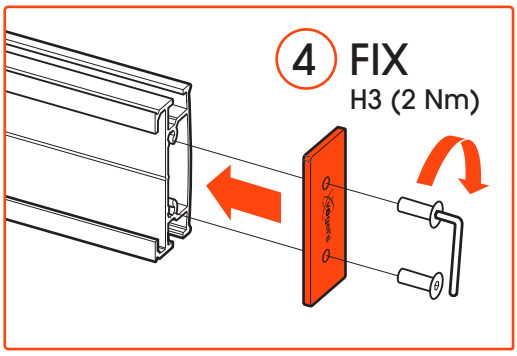

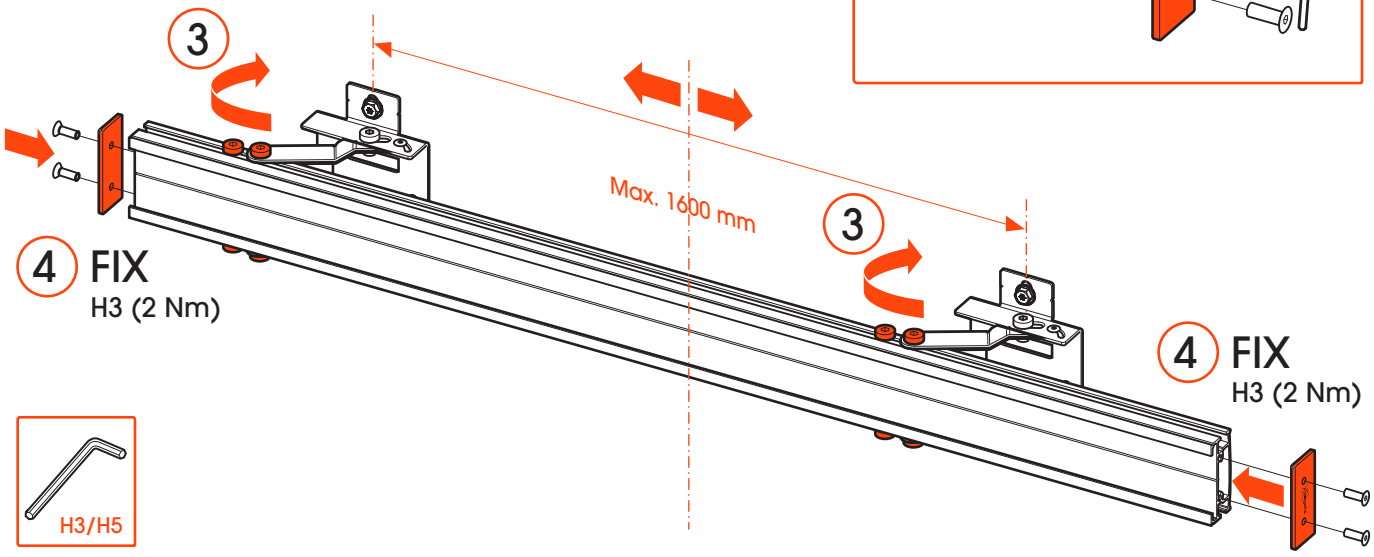


www.vogels.com

2a INSTALL **SECOND + BARS**

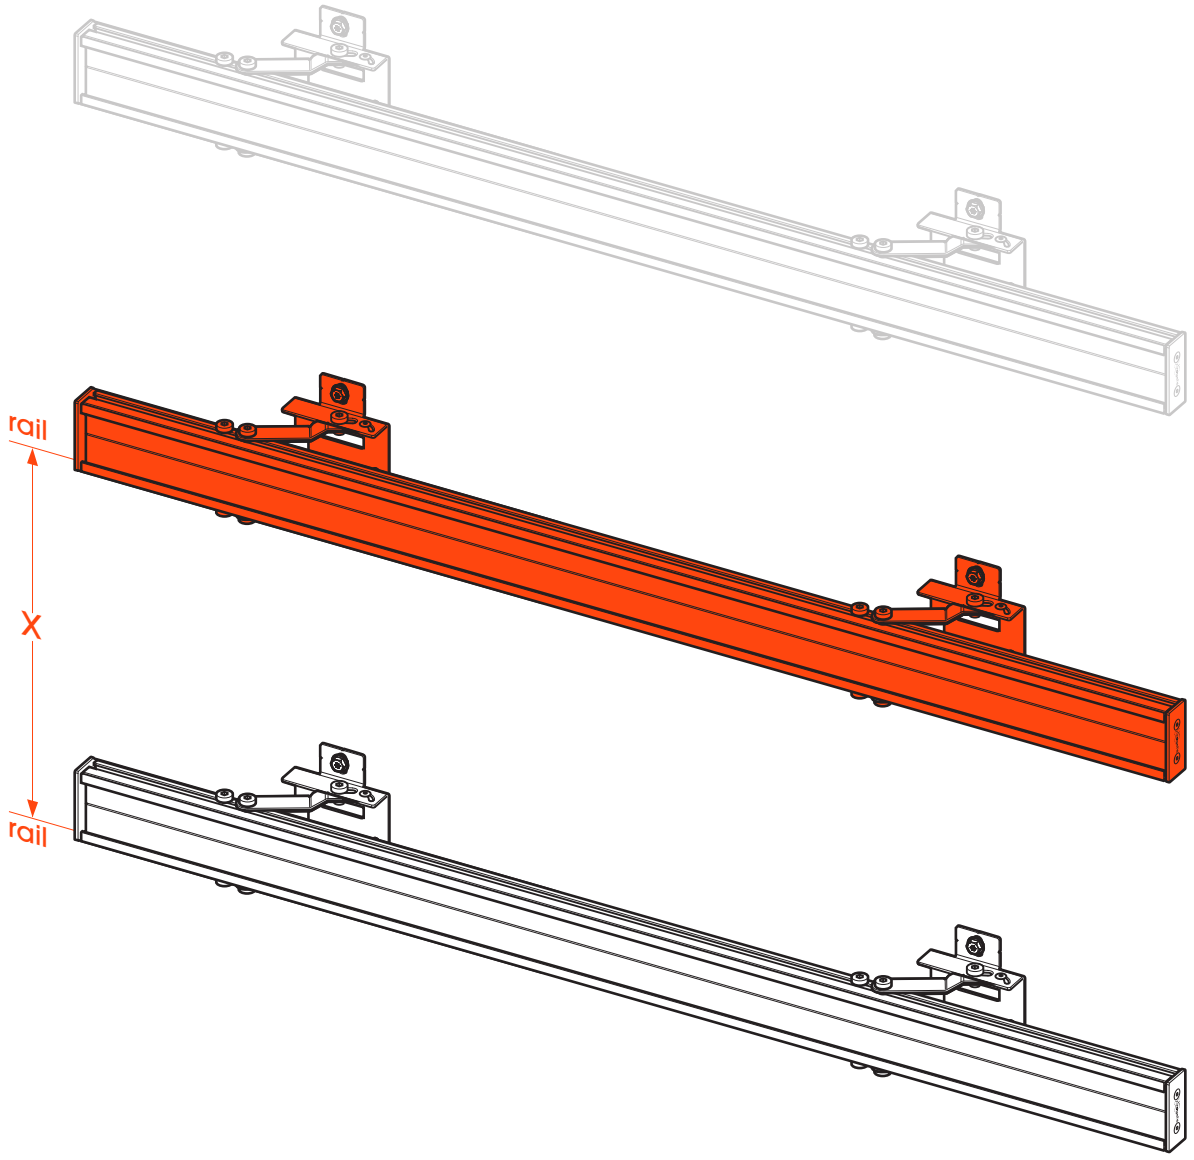


2b SLIDE BRACKETS ONTO THE SECOND BAR

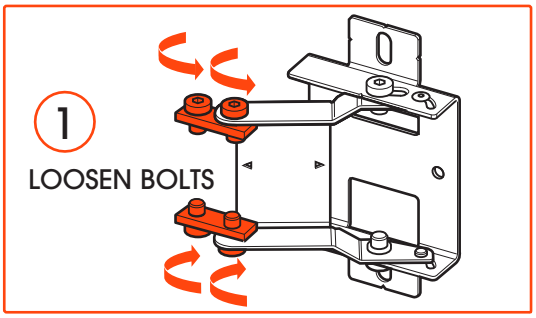




2c

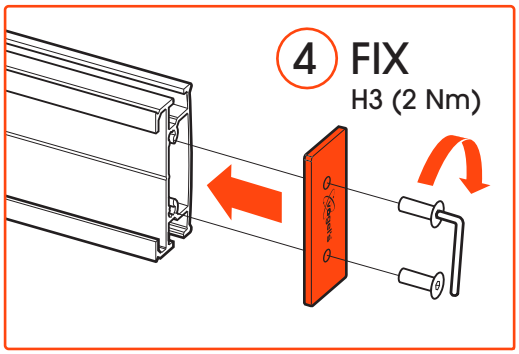


3 CENTER
+ FIX BRACKETS
H5 (15 Nm)

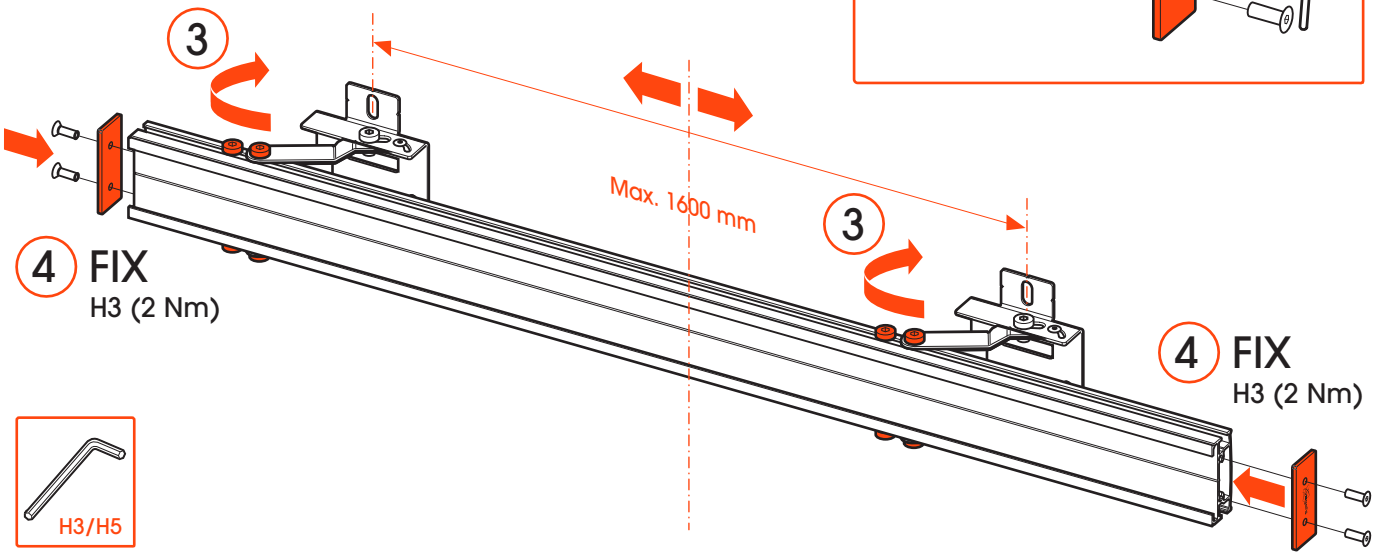


www.vogels.com

2d STEP-1... INSTALL **SECOND + BARS** USING SPACERS

set distance X of the spacers
check project drawing (supplied by Vogels)

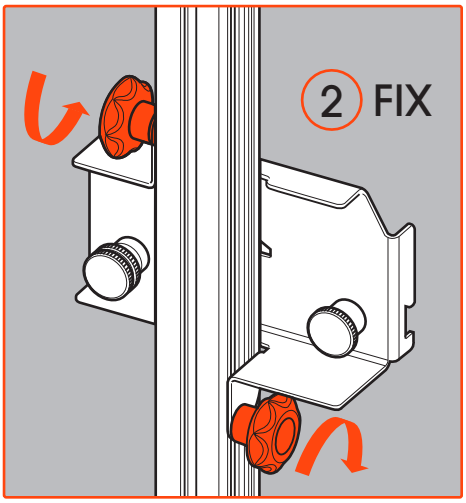

MEASURE EXACTLY

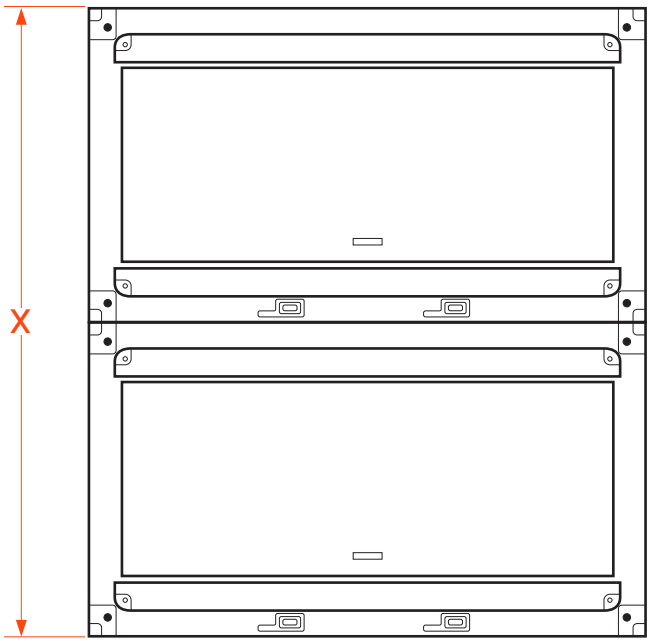




www.vogels.com

2e STEP-2... INSTALL **SECOND + BARS** USING SPACERS

place spacers in the two rails of the bar

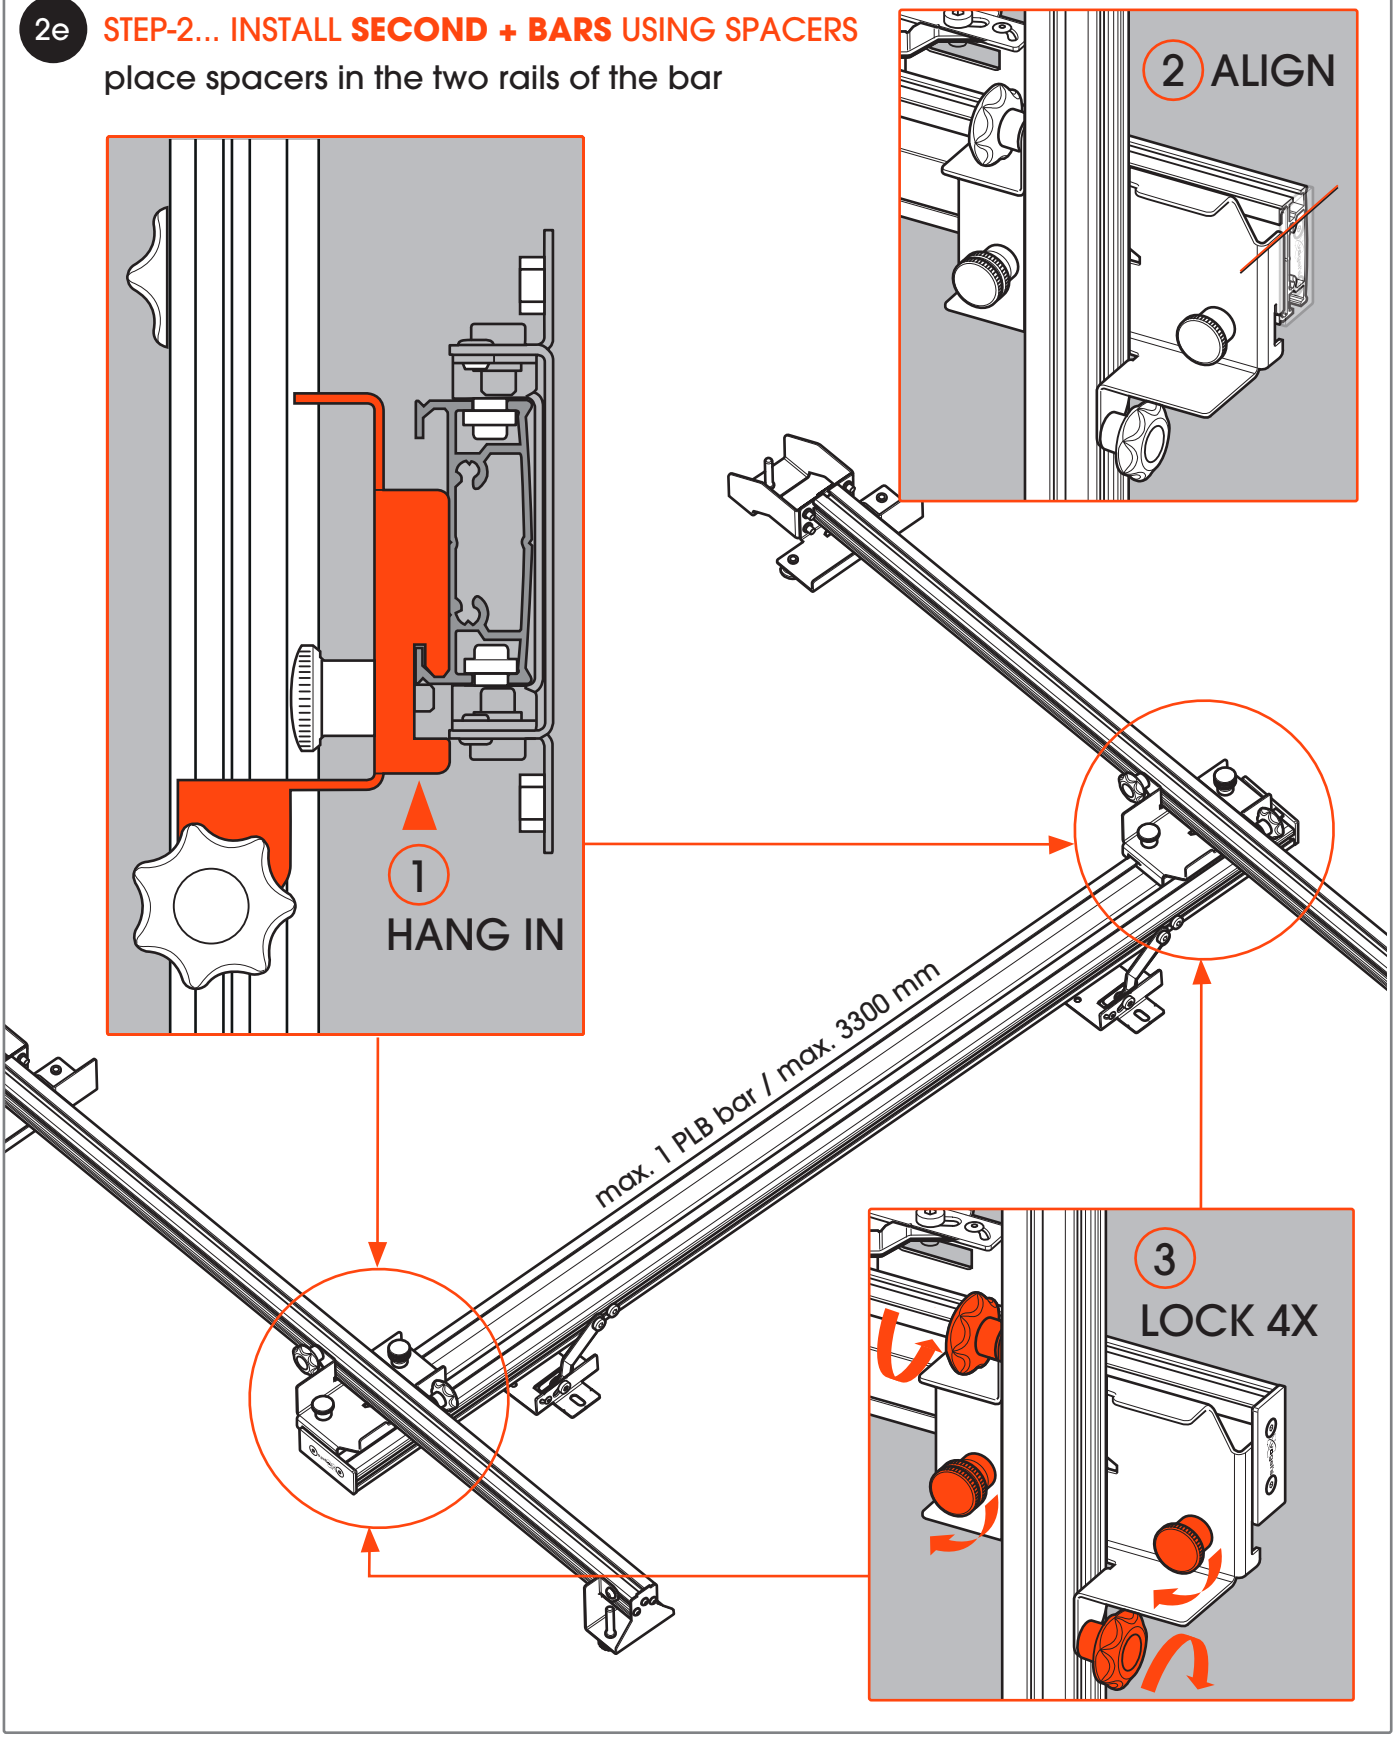


www.vogels.com

2f


STEP-3... INSTALL **SECOND + BARS** USING SPACERS

Place spacers with the bar to be mounted in the upper rail of the last mounted bar

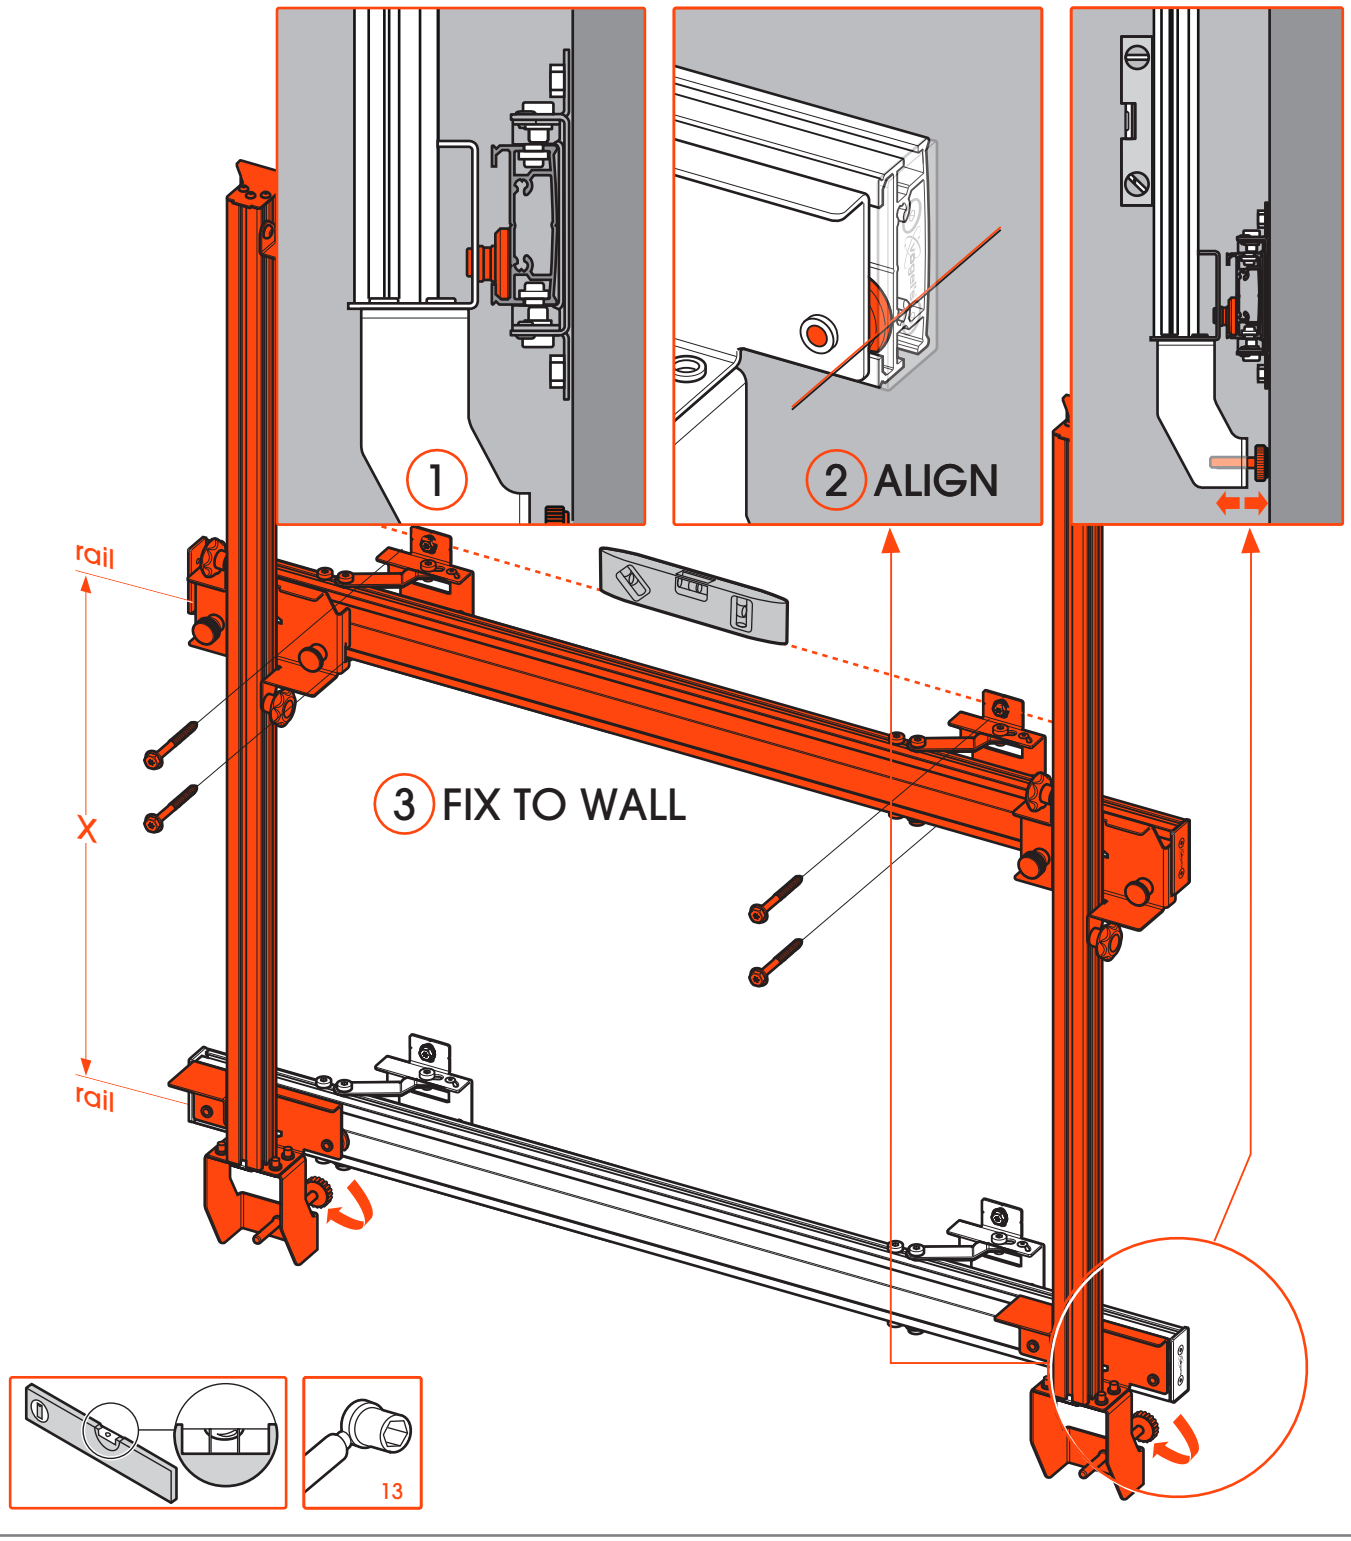


www.vogels.com


3a INSTALL **TOP BAR**

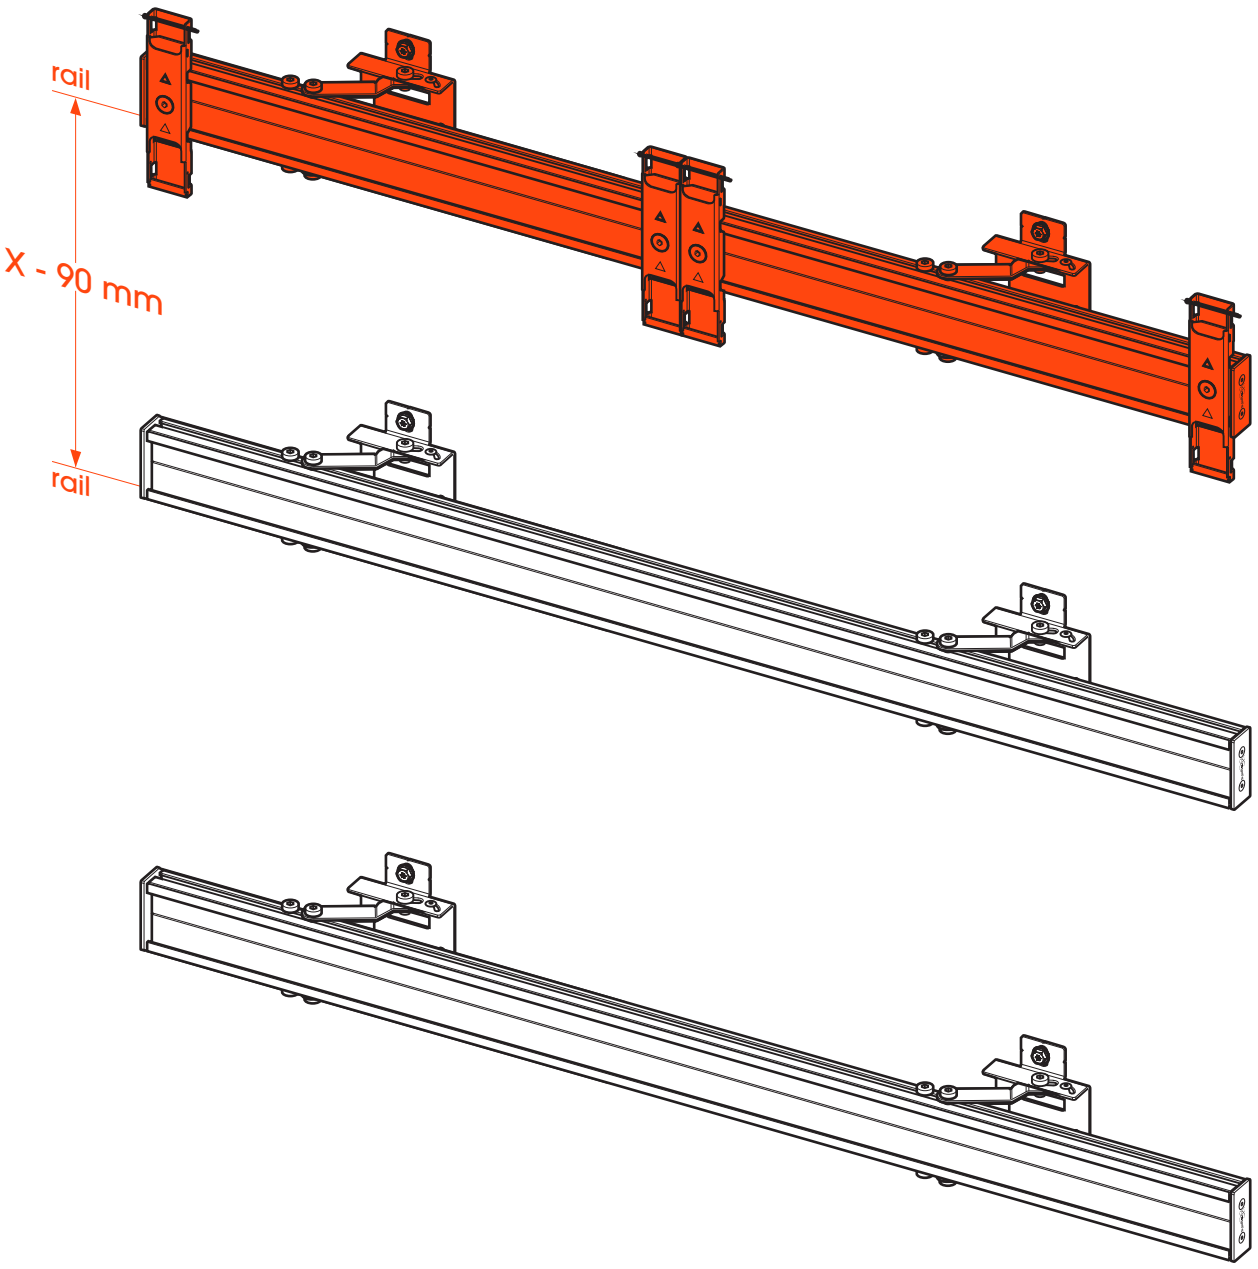

3b INSTALL TOP BAR
(slide brackets onto the bar)

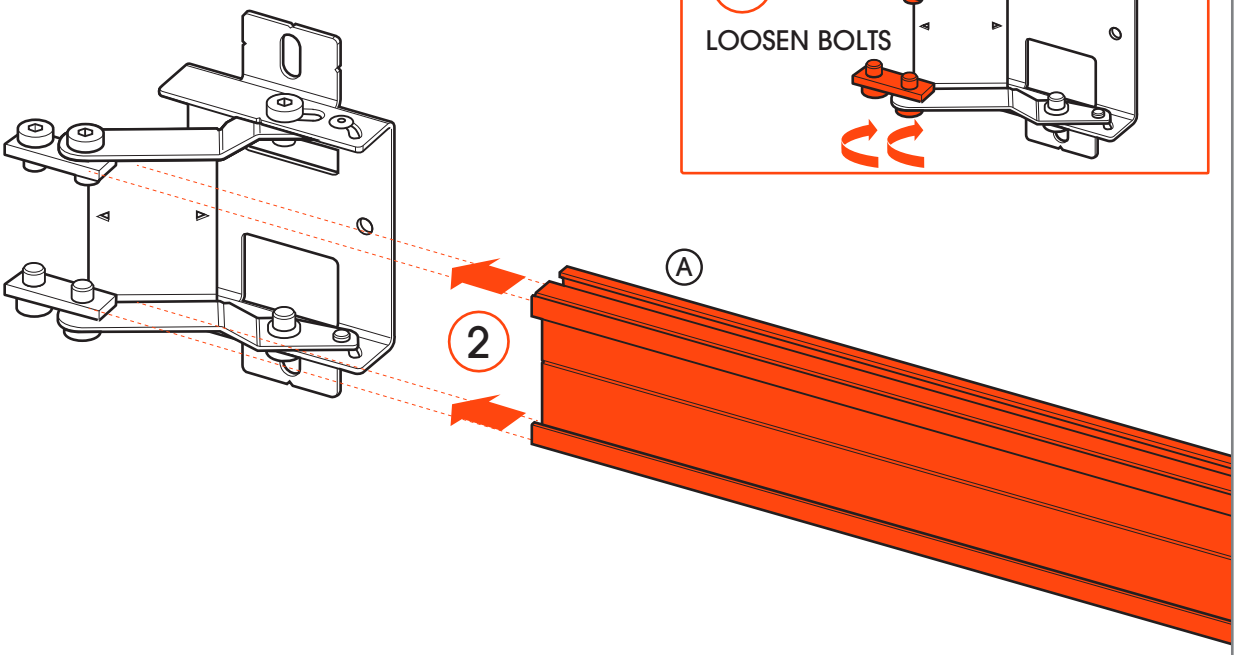


3c

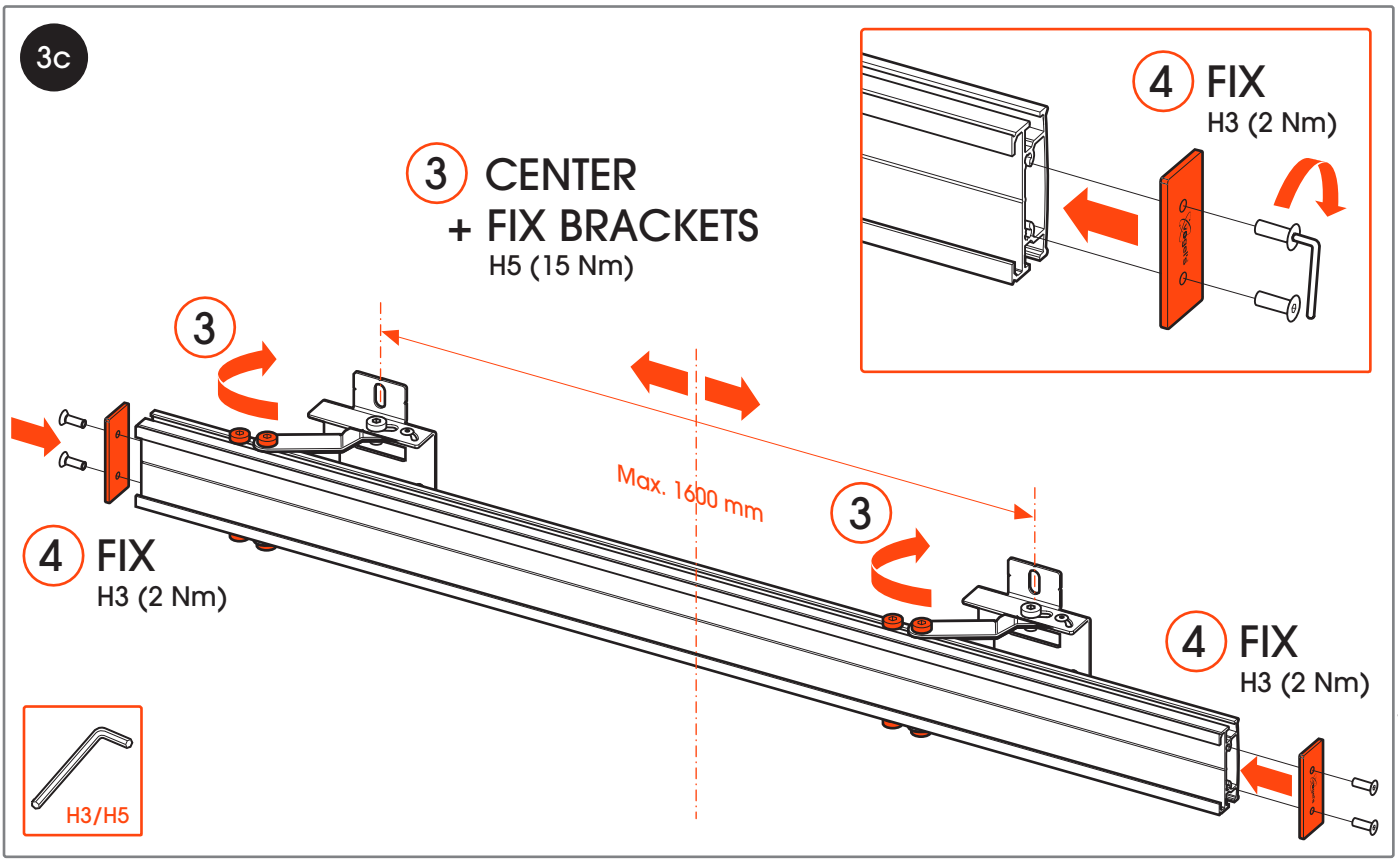


www.vogels.com

3d STEP-1... INSTALL **TOP BAR** USING SPACERS

set distance X-90 mm of the spacers
check project drawing (supplied by Vogels)

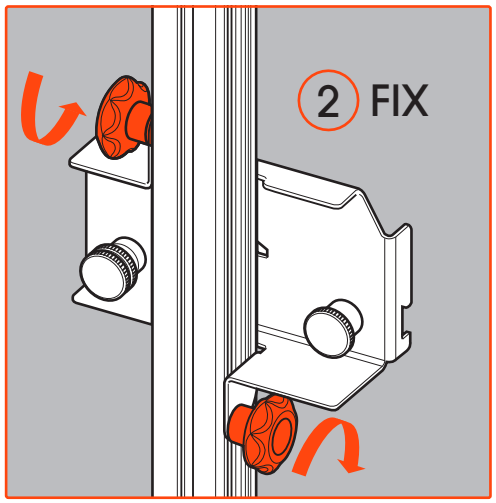

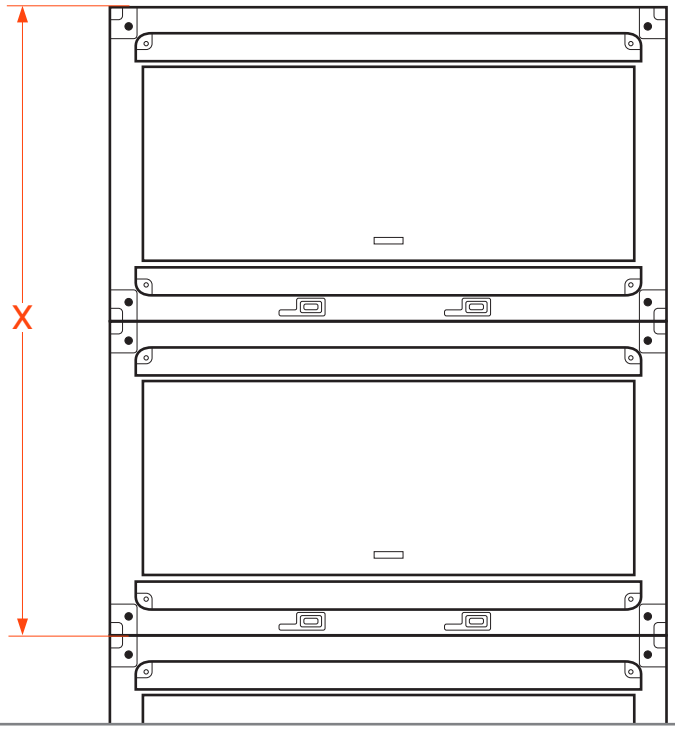




MEASURE EXACTLY
IN CASE OF THE USE OF
PLA 9309 (X - 90 mm)

www.vogels.com

3e STEP-2... INSTALL **TOP BAR** USING SPACERS


place the spacers in the lower rail of the bar

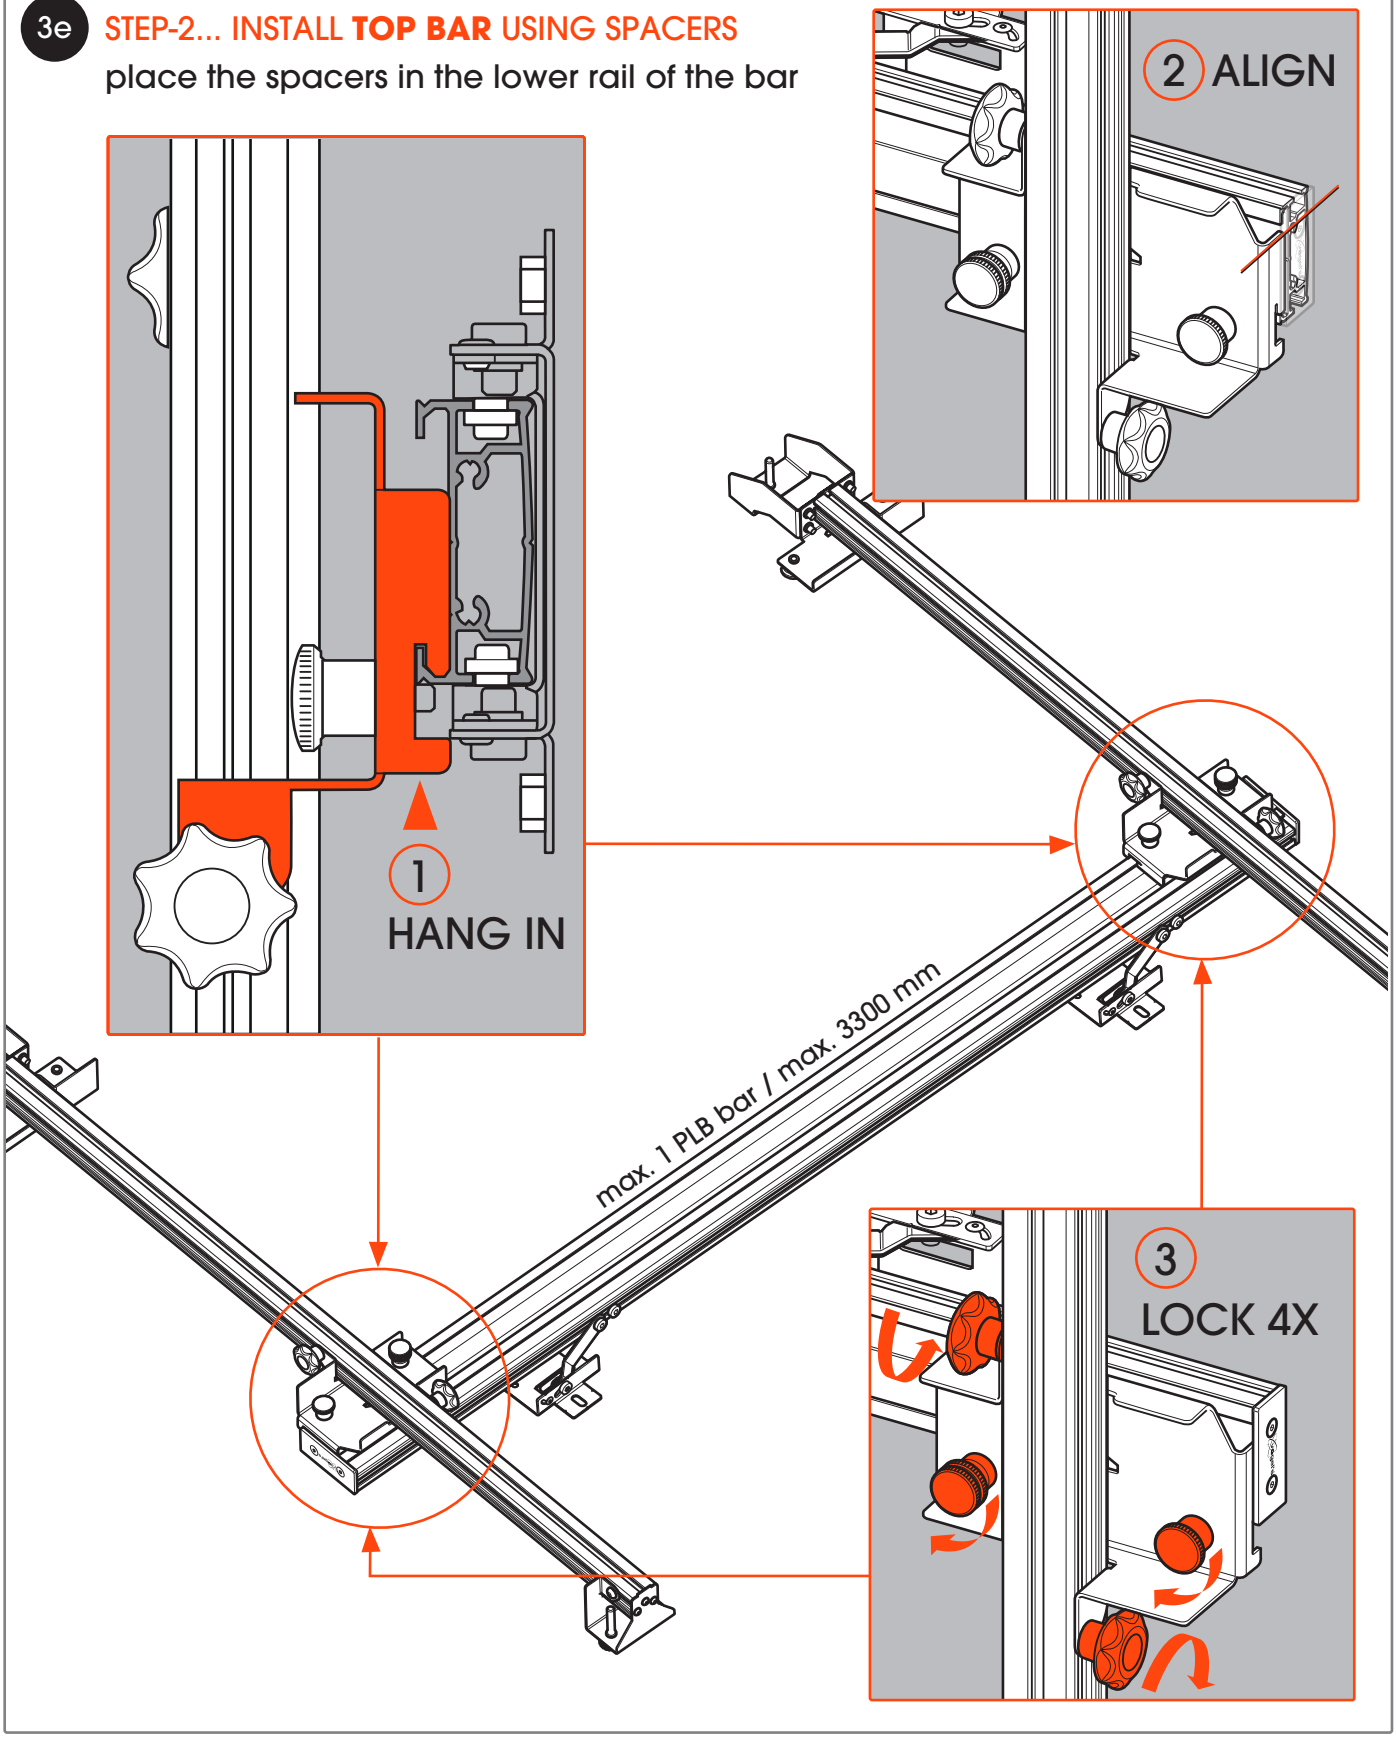

www.vogels.com

3f STEP-3... INSTALL **TOP BAR** USING SPACERS


Place the spacers with the bar to be mounted in the upper rail of the last mounted bar

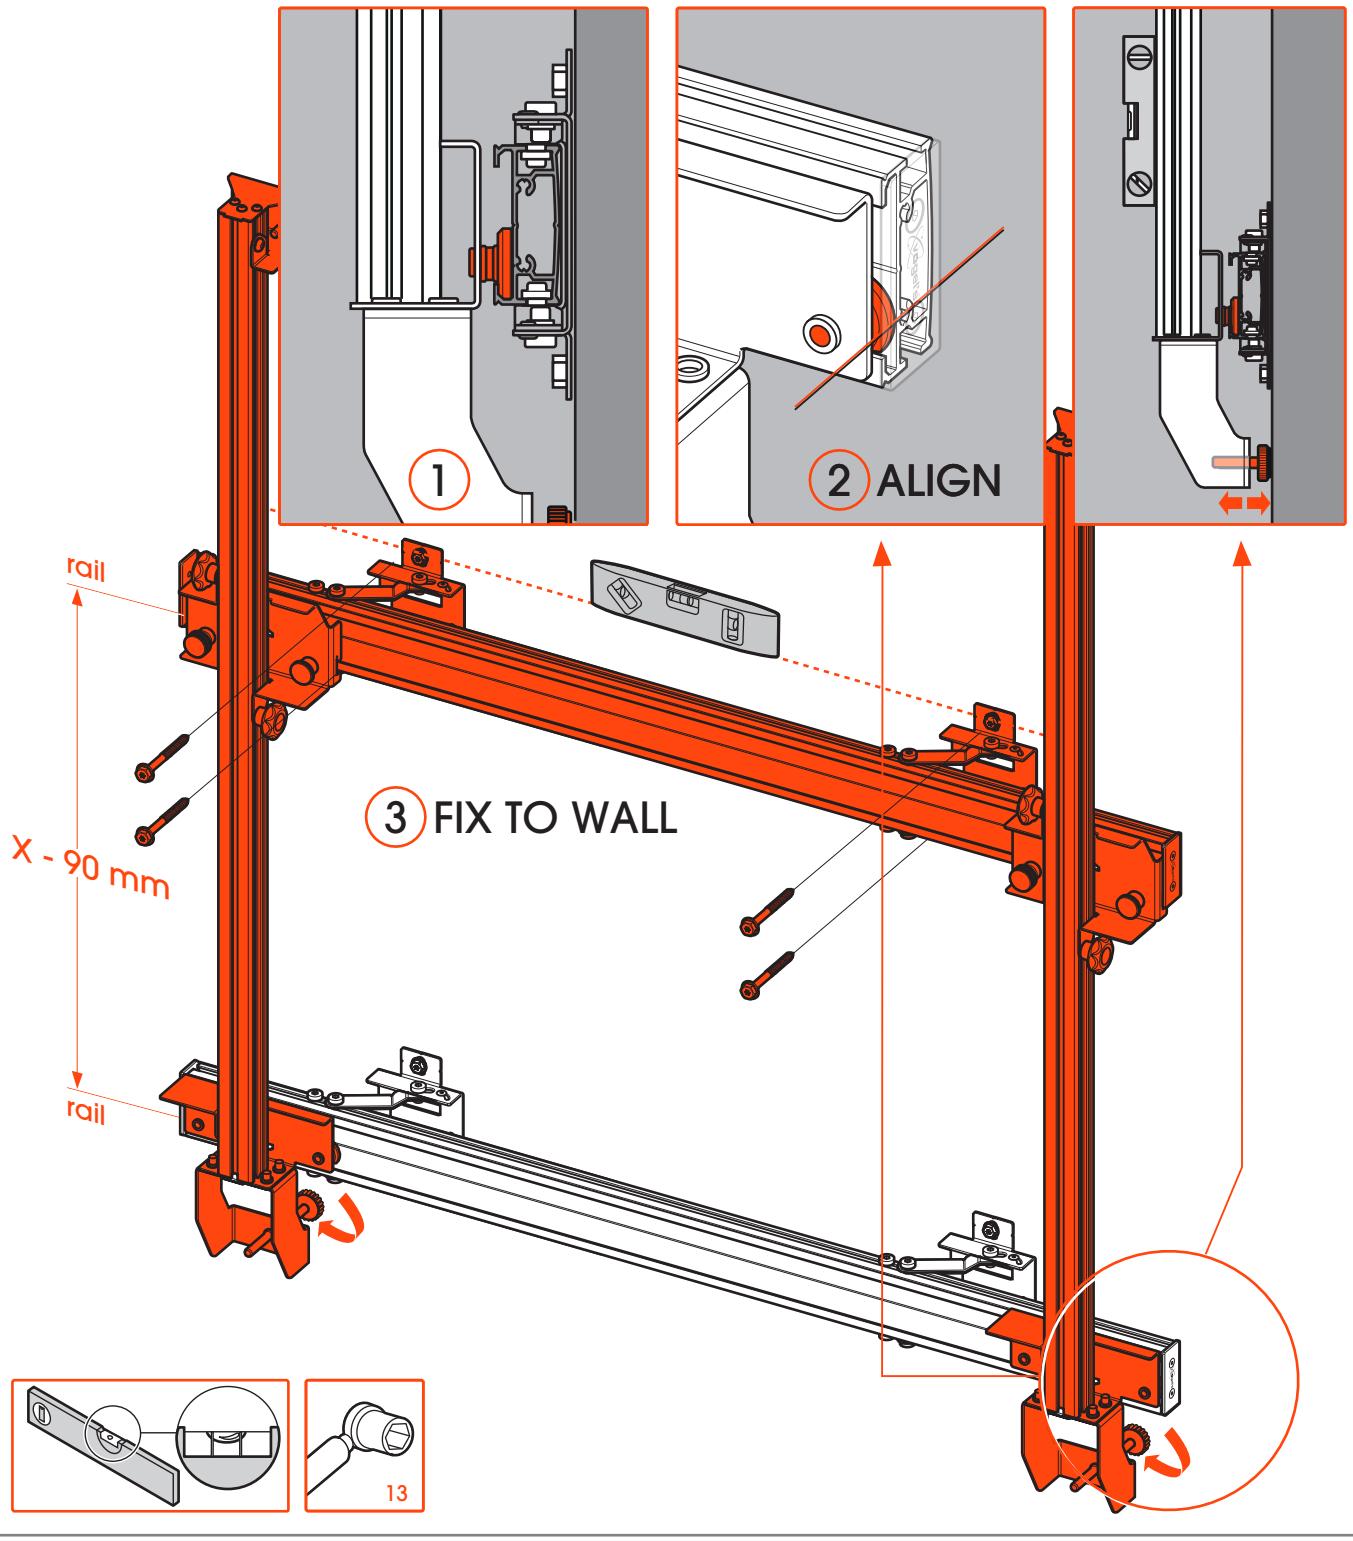


www.vogels.com

4a INSTALL CABINETS (STEP-1)

first connect 4 cabinets (2x2)* and
hang them left in the lower two bars

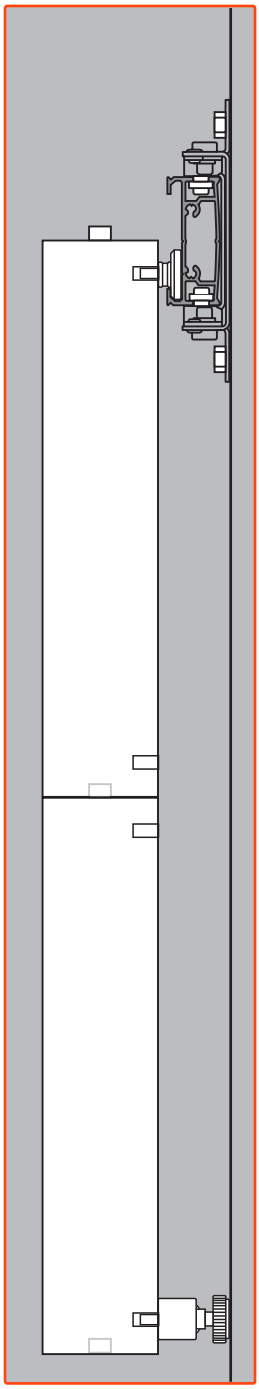

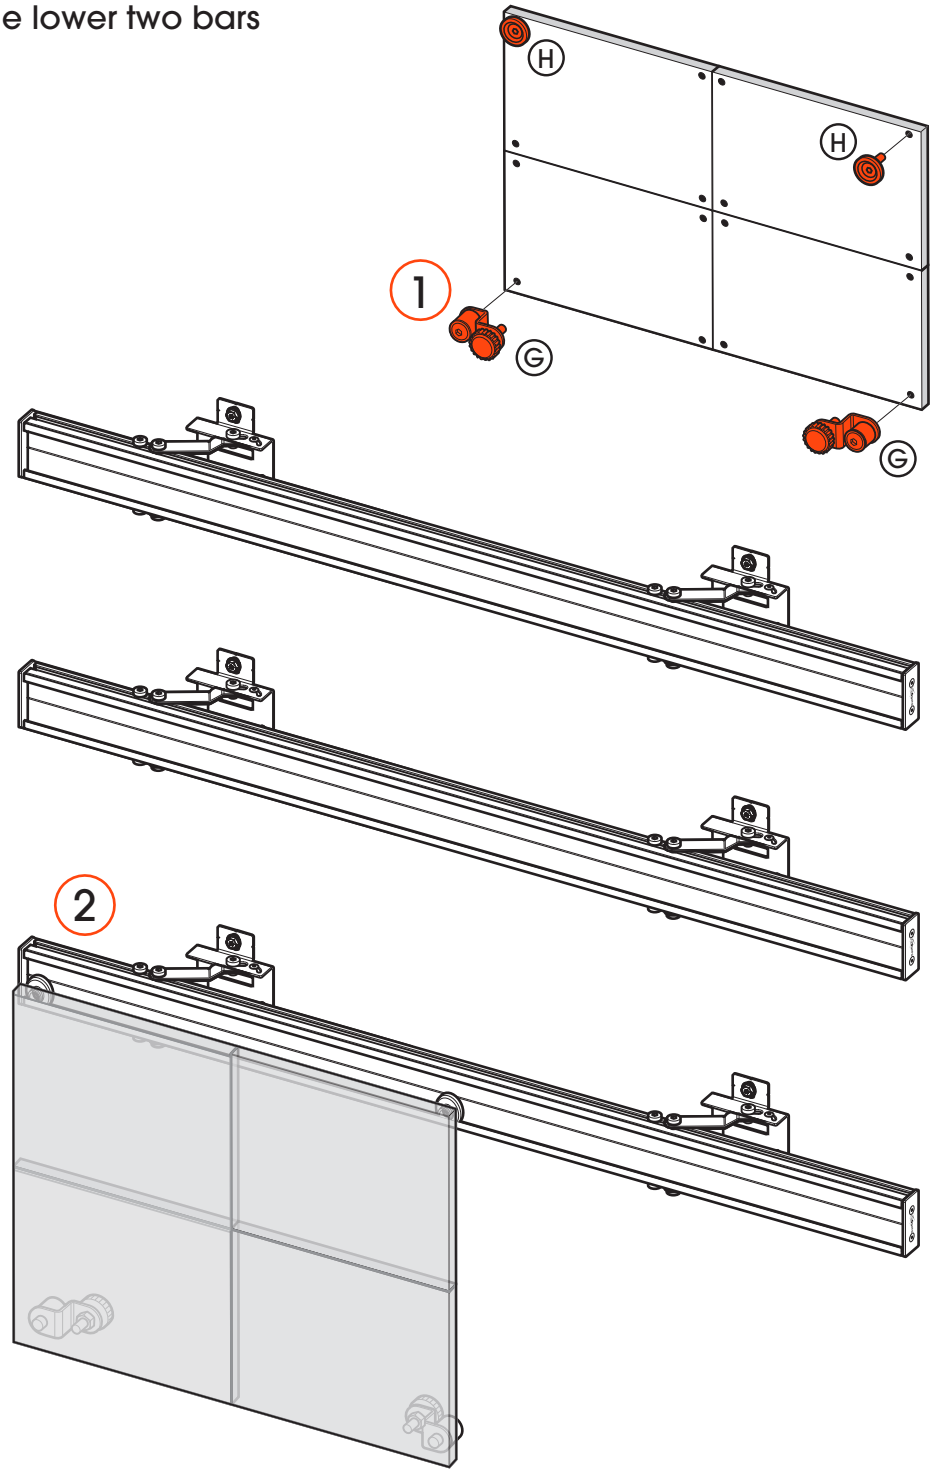



*Connect dvLED cabinets according to
dvLED brand description


www.vogels.com

4b INSTALL CABINETS (STEP-2)

after installing the first row of cabinets
start hanging the second row

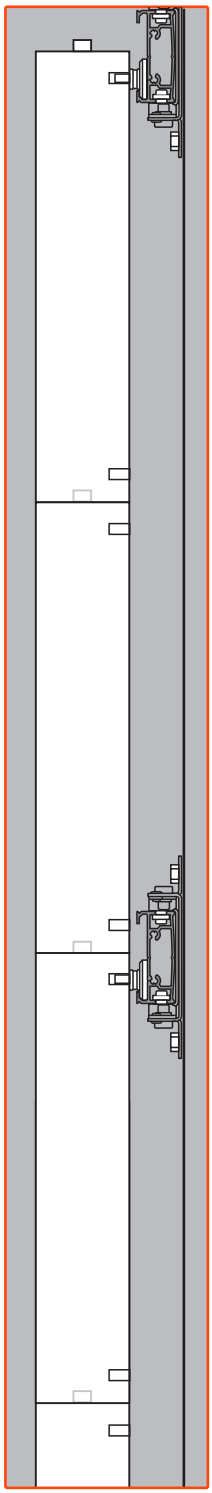

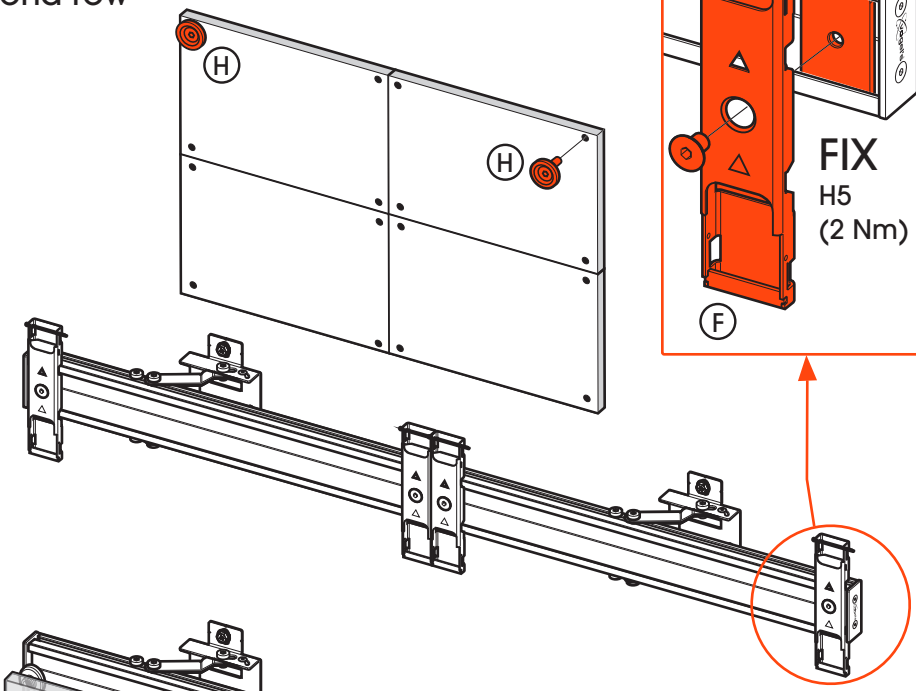


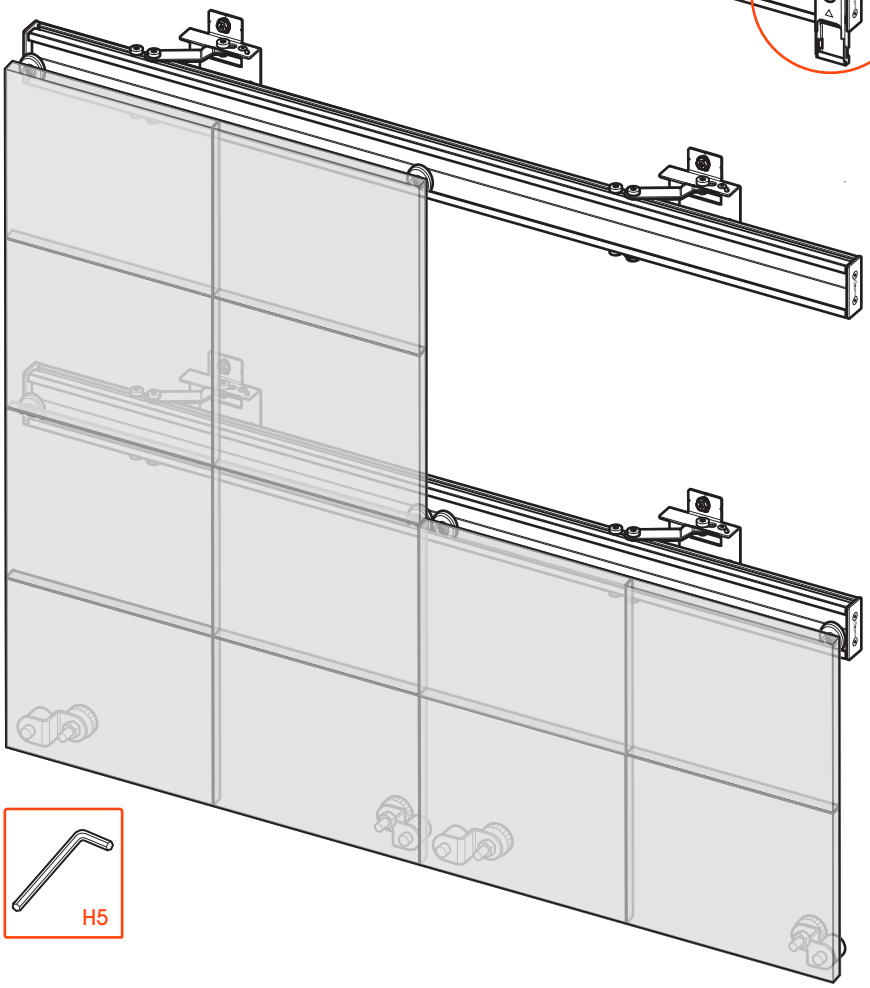



www.vogels.com


4c INSTALL CABINETS (STEP-3)

top row

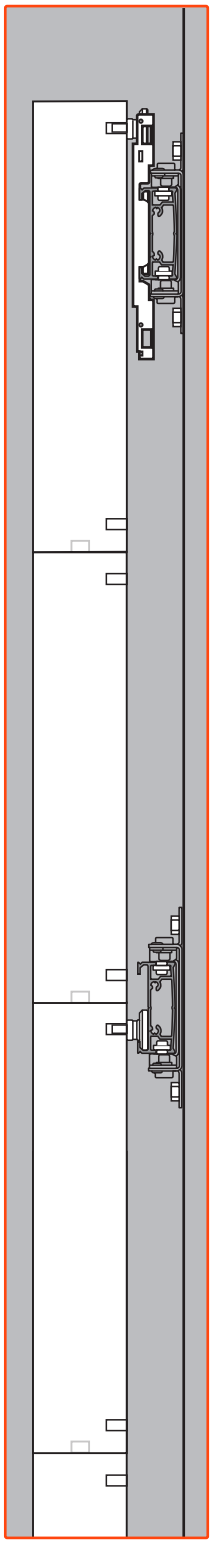

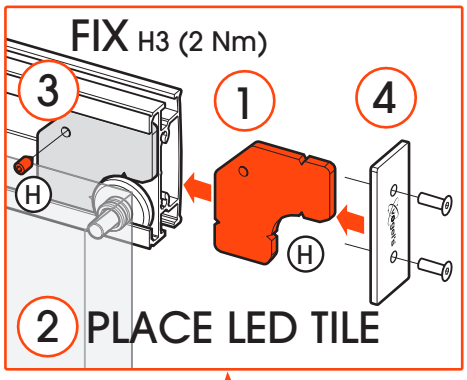

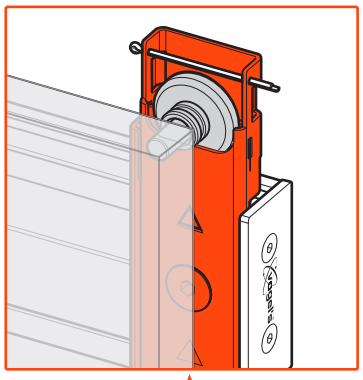

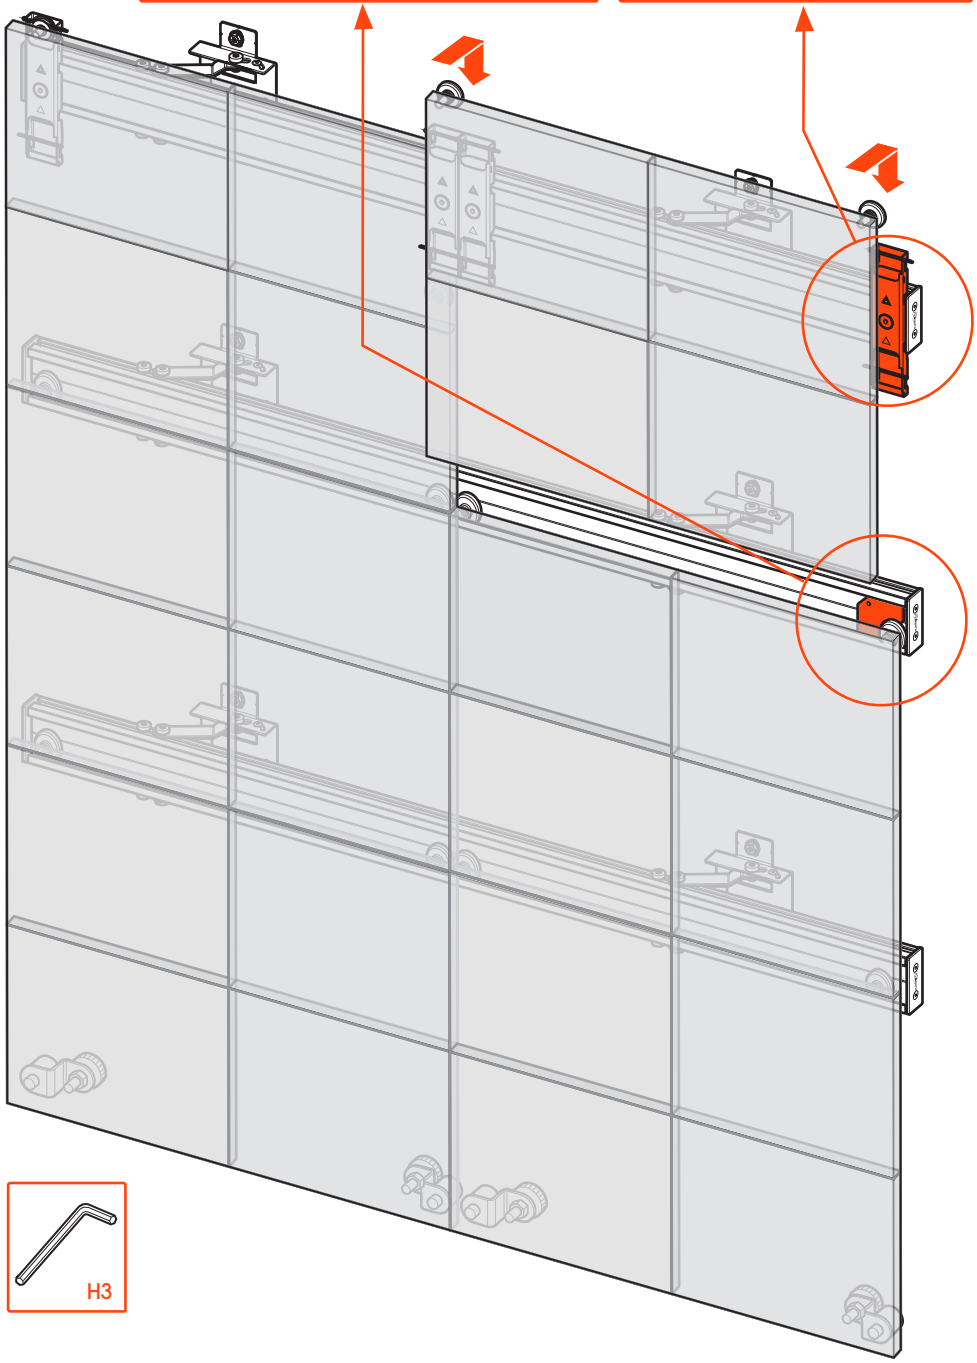

www.vogels.com

Vogel's Products BV
HONDSRUGLAAN 93,
5628 DB EINDHOVEN,
THE NETHERLANDS

T +31 (0)40 264 74 00
E info@vogels.com
W www.vogels.com

(GB) Subject to printing errors and technical amendments.
(NL) Drukfouten en technische wijzigingen voorbehouden.
(F) Sous réserve de fautes d'impression et de modifications techniques.
(D) Für Druckfehler übernehmen wir keine Verantwortung. Technische Änderungen vorbehalten
(E) Reservados errores de imprenta y sujete a modificationes.
(I) Con riserva di modifiche techniche e di eventueli errori di stampa.
(P) Reserva-se a ocorrência de gralhas e de modificações técnicas.
(H) Nyomdahibák és technikai változtatások joga fenntartva.
(PL) Zastrzega się możliwość występowania błędów drukarskich i zmian technicznych.

Designed and engineered in the Netherlands. More information on: www.vogels.com

VOGEL'S PRODUCTS BV, HONDSRUGLAAN 93, 5628 DB EINDHOVEN, THE NETHERLANDS

MOUIN_DVLED CONNECT-IT_V3