



Philips Signage Solutions  
D-Line Display

65"

Powered by Android  
500cd/m<sup>2</sup>

**Signage**Solutions

65BDL4150D

## Say more

Smart, fast 24/7 display.

Make it stand out with a fast D-Line professional 4K UHD display. Philips' superb picture quality ensures true colours and intense contrast. You can effortlessly display content from multiple sources on a single screen.

### **Superb picture. Blazing processor speed.**

- 4K UHD. Superb picture. Clear contrast.
- IPS panel: rich color consistency from every angle
- Android 7. Dedicated Android processor
- Proof of Play for Android content. Know what's playing
- Integrated dual-band WiFi

### **Effortless setup. Total control.**

- CMND & Deploy. Install and launch apps remotely
- Operate, monitor and maintain with CMND & Control
- CMND & Create. Develop and launch your own content
- OPS slot allows for PC embedding without cabling
- Integrated mPCIe slot for optional 4G/LTE module

### **Cost-effective system solution**

- FailOver ensures content is always playing
- QuadViewer. Play four source signals on one screen.

# PHILIPS

D-Line Display  
65" Powered by Android, 500cd/m<sup>2</sup>

# Highlights

## Powered by Android

Control your Philips professional display via an internet connection. The integrated Android OS (SoC) lets you install web and native Android apps directly to the display. A built-in scheduler makes it easy to launch apps and content based on time of day, or user.

## CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

## CMND & Create



Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure your stills, text, and video will be up and running in no time.


## CMND & Deploy

Quickly install and launch any app-even when you're off-site and working remotely. CMND & Deploy lets you add and update your own apps, as well as apps from the Philips Professional Display App Store. Simply scan the QR code, log in to the store, and click on the app you want to install. The app is automatically downloaded and launched.

## Integrated mPCIe slot

Easily connect 4G/LTE modules to your Philips professional display. The integrated mPCIe slot enables your display to communicate with other devices that share the same wireless connectivity. Invaluable if you're installing displays in locations such as banks or government buildings, where you cannot get onto the local network.

## FailOver




From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs ensuring content keeps playing even if the primary source

65BDL4150D/00

goes down. Simply set a list of alternate inputs to be sure your business is always on.

## QuadViewer



Turn a single Philips Professional Display into a bezel-free 2x2 videowall. By connecting four independent sources, you can effortlessly play multiple channels at once. Simply tell the display which zone should play which content. Ideal for situations like broadcast control rooms, where feeds from multiple cameras need to be clearly visible.

## Proof of Play

Be sure your Android-powered Philips Professional Display is showing the right content-even when you're not there. When playing content via the embedded media player, you can set up your display to take automatic screenshots at regular intervals. Screenshots are stored on the display's internal memory, and you can choose to receive them via email.

# Specifications

## Picture/Display

- Diagonal screen size: 64.5 inch / 163.8 cm
- Panel resolution: 3840 x 2160
- Optimum resolution: 3840 x 2160 @60Hz
- Brightness: 500 cd/m<sup>2</sup>
- Contrast ratio (typical): 1100:1
- Aspect ratio: 16:9
- Response time (typical): 8 ms
- Pixel pitch: 0.429 (H) x 0.429 (V) [mm]
- Display colors: 1.07 Billion
- Viewing angle (H / V): 178 / 178 degree
- Operating system: Android 7.1.2

## Connectivity

- Video input: DVI-D, VGA (Analog D-Sub), HDMI 2.0 (x3), Display Port 1.2 (x1)
- Video output: DisplayPort 1.2 (x1)
- Audio input: 3.5 mm jack
- Audio output: SPDIF, 3.5mm jack, External speaker connection
- Other connections: OPS, Micro USB (x1) (OTG), USB 2.0, USB 3.0, mPCIe
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack

## Supported Display Resolution

### • Computer formats

| Resolution  | Refresh rate  |
|-------------|---------------|
| 4096 x 2160 | 24Hz          |
| 3840 x 2160 | 24,25,30,60Hz |
| 1920 x 1200 | 60Hz          |
| 1920 x 1080 | 60Hz          |
| 1680 x 1050 | 60Hz          |
| 1600 x 1200 | 60Hz          |
| 1600 x 900  | 60Hz          |
| 1440 x 1050 | 60Hz          |
| 1440 x 900  | 60, 75Hz      |
| 1400 x 1050 | 60, 75Hz      |
| 1366 x 768  | 60Hz          |
| 1360 x 768  | 60Hz          |
| 1280x1024   | 60,67,75Hz    |
| 1280 x 960  | 60Hz          |
| 1280 x 800  | 60,75Hz       |
| 1280 x 768  | 60Hz, 75Hz    |
| 1280 x 720  | 60,70Hz       |

|            |                  |
|------------|------------------|
| 1152 x 900 | 66Hz             |
| 1152 x 864 | 60, 70, 75Hz     |
| 1024x768   | 60,70Hz          |
| 960x720    | 75Hz             |
| 848 x 480  | 60Hz             |
| 832 x 624  | 75Hz             |
| 800 x 600  | 56, 60, 72, 75Hz |
| 720 x 400  | 70Hz             |
| 640 x 480  | 60, 67, 72, 75Hz |
| 640 x 350  | 70Hz             |

### • Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 4K x 2K    | 50,60Hz      |
| 1080p      | 50, 60Hz     |
| 1080i      | 50, 60Hz     |
| 720p       | 50, 60Hz     |
| 576p       | 50Hz         |
| 576i       | 50Hz         |
| 480p       | 60Hz         |
| 480i       | 60Hz         |

## Dimensions

- Set dimensions (W x H x D): 1457.8 x 835.6 x 66.9 (@Wall mount)/ 70.5 (handle) mm
- Set dimensions in inch (W x H x D): 57.39 x 32.90 x 2.63 inch(wall mount)/2.78 (handle) inch
- Bezel width: 11.7mm(T), 12.2mm (L/R), 15.3mm (B)
- Product weight (lb): 80.47 lb
- Product weight: 36.5 kg
- VESA Mount: 400mm(H) x 400mm(V), M6
- Smart Insert mount: 100 x 100 mm, 100 x 200 mm

## Convenience

- Placement: Landscape, Portrait
- Tiled Matrix: Up to 10 x 15
- Keyboard control: Hidden, Lockable
- Signal loop through: IR Loopthrough, DisplayPort
- Network controllable: RJ45, RS232
- Screen saving functions: Pixel Shift, Low Bright

## Power

- Standby power consumption: <0.5 W
- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz

- Consumption (Typical): 150 W
- Consumption (Max): 267 W

## Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Altitude: 0 ~ 3000 m
- MTBF: 50,000 hour(s)
- Humidity range (operation)[RH]: 20 ~ 80% (without condensation)
- Humidity range (storage) [RH]: 5 ~ 95% (without condensation)

## Sound

- Built-in speakers: 2 x 10W RMS

## Accessories

- Included accessories: AC Power Cord, Batteries for remote control, Remote Control, RS232 cable, HDMI cable, Quick start guide
- Included Accessories: Dipole antenna (x2), IR sensor cable (1.8 m) (x1), M2 Screw (x2), M3 screw (x1), Philips logo (x1), RS232 Daisy chain cable (x1), SD card cover (x1)
- Stand: BM05922 (Optional)

## Multimedia Applications


- USB Playback Audio: AAC, M4A, MP3, WMA
- USB Playback Picture: BMP, JPEG, JPG, PNG
- USB Playback Video: AVI, DAT, FLV, MKV, MP4, MPEG, MPG, TS, VOB

## Miscellaneous

- On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Danish, Dutch, Finnish, Norwegian, Portuguese, Swedish
- Regulatory approvals: CB, CE, BSMI, CCC, CECP, CU, EMF, EnergyStar 7.0, FCC, Class A, PSB, RoHS, UL/cUL, VCCI, J-Moss, PSE
- Warranty: 3 year warranty

## Internal Player

- CPU: Dual-Core Cortex-A72 @2GHz, Quad-Core Cortex-A53 @ 1.5GHz
- GPU: ARM Mali-T860 MP4
- Memory: 4GB RAM
- Storage: 32 GB eMMC
- Wifi: 2T2R, 802.11 ac/a/b/g/n, WCT07R2201

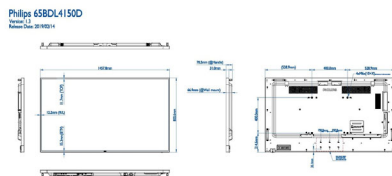

Issue date 2020-12-11

Version: 8.1.1

12 NC: 8670 001 56369  
EAN: 87 12581 75356 6

© 2020 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)